


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by David P. Thompson under GLO contract Number 103, dated 1863. Surveyor General record states:

Set post for corner to Secs 13, 14, 23, & 24 in mound of earth with charred stake, pits, and trench as per instructions

T 4 S R 39 E N - 21

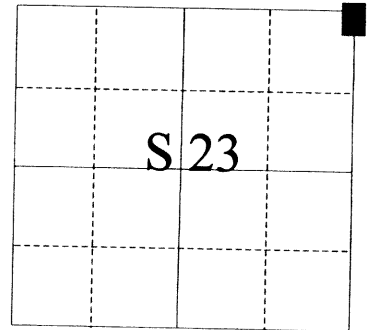

DESCRIPTION OF CORNER EVIDENCE FOUND:
NONE


See Survey No. 032-1999

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


At proportionate position determined by survey, I set a 2½"x30" aluminum mounument with aluminum cap marked as shown below, 30" in the ground.

- A 5/8"x30" iron rebar with aluminum cap marked NE RP bears N 40°E, a distance of 40.22 feet.
- A 5/8"x30" iron rebar with aluminum cap marked SE RP bears S 43°E, a distance of 8.05 feet.
- A 5/8"x30" iron rebar with aluminum cap marked SW RP bears S 39°W, a distance of 6.60 feet.
- A 5/8"x30" iron rebar with aluminum cap marked NW RP bears N 36°W, a distance of 39.95 feet.

I hereby certify that the corner was monumented on June 10, 1999.
Witness: Gregory T. Blackman, Jr. and Norb Volny

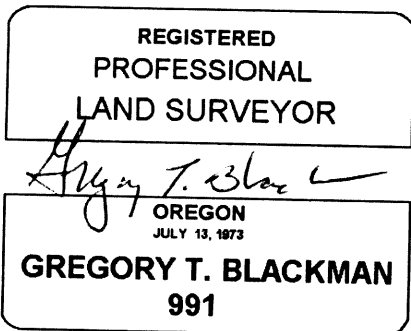

Renewal Date: December, 31 1999

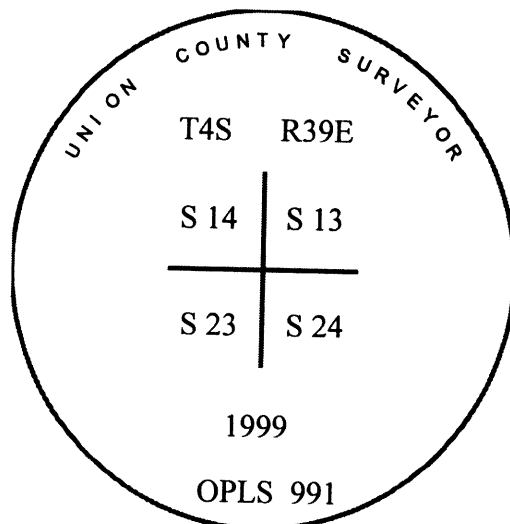

UNION COUNTY SURVEYOR

Date Received 9/13/99

Date Filed 10/8/99

Filed By R. ROBINSON, DEPUTY

File Number 043-19992

I used a Leica TCA-1100 and circular prism in the establishment of the new accessories. The Basis of Bearings is the same as Survey No. 032-1999. The distances are the center of each bearing object, unless otherwise noted above

GEODETTIC CONTROL DATA

**OREGON STATE PLANE, NORTH ZONE (3601)
UNION COUNTY, OREGON**

STA. NAME: 9929

SECTION CORNER: GEODETTIC COOR: NAD 83(91)
SEC 14 | 13
SEC.23 | 24 TWP.4 S. RGE.39 E LAT: 45°12'34.53430" N
UNION COUNTY, OREGON LONG: 117°53'28.58596" W
DATE TIED: JULY, 1999

SURVEYOR: WALTER L. CASWELL SP. COOR: NAD 83(91)
PLS 737 N: 573360.012 INT.FT


FIRM: EAGLE GPS SURVEY CORP E: 8874282.650 INT.FT.
611C SW LOMBARD AVE.
BEAVERTON, OR. 97008-4736 THETA: 1°51'00.259"
(503) 643-1073

TYPE: GPS SCALE FACTOR: 0.999894836

ORDER: SECOND CLASS: 1 ELEV: 2734.29 U.S.FT.

ELEV. DATUM: NGVD 1929(1947)

DIRECTIONS "TO REACH":



Albert Hertel 10-14-99
OREGON
JULY 18, 1980
ALBERT HERTEL
1896

EXPIRES: 06/30/01

1 METER = 3.280833... U.S. FEET = 39.37 INCHES EXACTLY
1 METER = 3.280839895 INTL. FEET OR 1 INCH = 2.54CM. EXACTLY
TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)
DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

JOB 99-005
SHEET 46 OF 63