


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established by John H. Stone under GLO contract Number 235, dated July 6, 1875. Surveyor General field notes state:

Set a stone 18x12x6, from which
A Fir 16 in in dia bears S 5° E 20 lks dist

T 4 S R 40 E E-23

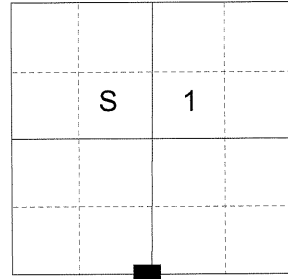

DESCRIPTION OF CORNER EVIDENCE FOUND:

None

See Survey Number 022-2015

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At proportionate position, I set a 2 ½" x 30" aluminum pipe with a 2 ½" aluminum cap marked as shown below, 25" in the ground with mound of stone 2 foot base to top of cap.
From which:

NEW BEARING OBJECTS:

A 9" Ponderosa Pine bears North 57° East, a distance of 25.10 feet, marked 1/4 S1 BT.
A 4" Ponderosa Pine bears South 3° East, a distance of 38.20 feet, marked X BT.
A 10" Ponderosa Pine bears North 77° West, a distance of 13.50 feet, marked X BT.
An 11" Ponderosa Pine bears North 21° West, a distance of 15.75 feet, marked 1/4 S1 BT.

I set a steel fencepost approximately 1 foot North of corner monument.

I hereby certify that the corner was monumented on April 20, 2015.


Witness: Thomas J. Kopp

REGISTERED
PROFESSIONAL
LAND SURVEYOR



OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2017

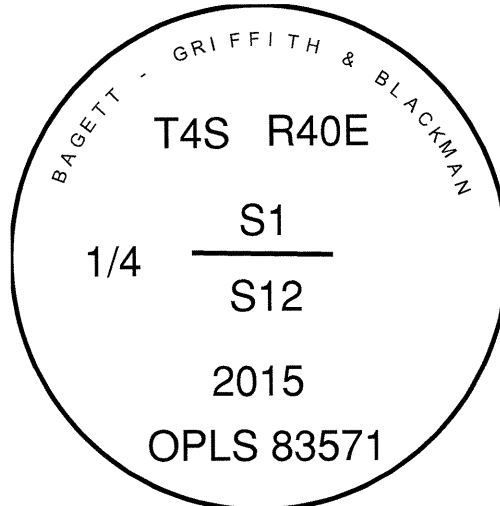

**UNION COUNTY
SURVEYOR**

Date Received 4/28/15
Date Filed 4/28/15
Filed By [Signature]
File Number 096-2015R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 16° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.