


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

**History of original corner establishment:**

Corner originally established by GLO contract with work dated August 21, 1863. Surveyor General record states: Set post corner to secs 13, 18, 19 & 24. Made mound of earth and drove charred stake as per instructions.

Survey number 14-71 by Harvey L. Barber states: Found a buff colored basalt stone, mason cut, 4" x 7" 3" deep in center of road. Set 1/2 inch diameter x 23 3/4 inch galvanized iron pipe on North side flush with top of stone.

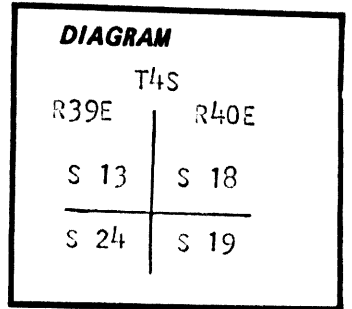

**Description of corner evidence found:**

Found 1/2 inch diameter pipe as per survey number 14-71


**Description of monument and accessories I established to perpetuate the original location of this corner:**

NONE

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Gregory T. Blackman*

**OREGON**  
JULY 13, 1973  
**GREGORY T. BLACKMAN**  
991

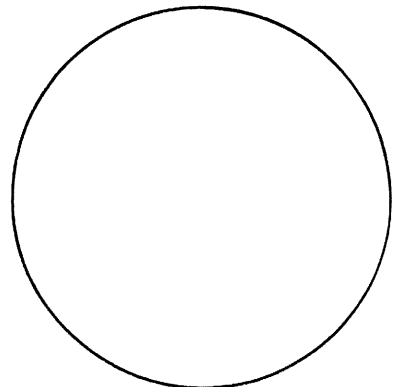

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

**UNION COUNTY  
SURVEYOR**

Date Received 6-6-84  
\*GPO-798-276

Date Filed 6-7-84

By G. LANGLITZ, DEPUTY

File No. 866-84 R

**UNION COUNTY SURVEYOR**

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by Timothy W. Davenport, July 20, 1863 contract No. 102.

Surveyor General record states:

Set post to Secs 13, 18, 19, 24 made mound of earth and drove charred stakes.

Survey 155 and 116 call known corner

Survey No. 44-70 states found marked stone

Survey No. 14-71 states found stone, set 1/2" x 23

3/4" galvanized pipe

Survey Nos. 57-71, 71-82, 91-72, 24-73, 74-73 call found stone

Survey Nos. 20-74, 27-82, 33-82, states found 1" pipe


Survey No. 74-74 states found corner

Survey Nos. 91-74, 72-77, 20-82, 36-82, 032-1999 states found 1/2" pipe

Survey No. 19-76 states found 3/4" pipe

Survey Nos. 113-78, 17-79, 24-79, 31-79, 35-79, 22-80, 20-81, 30-81, 16-79, 19-79, 52-80, and 87-80 state found monument of record

T 4 S R 39 E N - 25



No record of subsequent monumentation found in Union County survey records.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found 1/2" iron pipe set by Survey No. 14-71 with stone buried alongside

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At position of 1/2" iron pipe, I set a 2 1/2" x 30" copper clad monument in a water valve box, marked as shown below, 35" in the ground from which:

A 5/8" x 30" rebar with 1 1/2" aluminum cap bears N65°E, a distance of 33.21 feet, marked UNION COUNTY SURVEYOR NE RP.

A 5/8" x 30" rebar with 1 1/2" aluminum cap bears S50°E, a distance of 28.78 feet, marked UNION COUNTY SURVEYOR SE RP.

A 60d spike in power pole #055180001, 1 ft. above ground, bears S27°W, a distance of 51.20 feet.

A 60d spike in power pole #055180003, 1 ft. above ground, bears N10°W, a distance of 96.90 feet.


I hereby certify that the corner was monumented on February 12, 2001.

Witness: Norbert Volny and Gregory T. Blackman, Jr.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JULY 13, 1973  
GREGORY T. BLACKMAN  
991

Renewal Date: Dec. 31, 2001

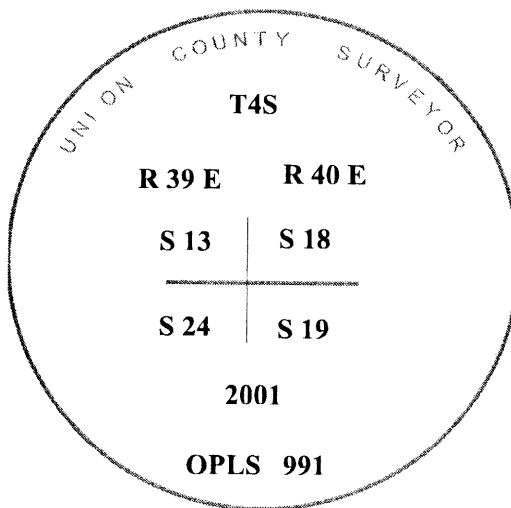

**UNION COUNTY SURVEYOR**

Date Received 3/29/01

Date Filed 3/31/01

Filed By R. ROBINSON, DEPUTY

File Number 016-2001R

I used a compass and steel tape in the establishment of the new accessories. I used 18° East declination. The distances are to the center of a 5/8"x30" rebar with 1 1/2" aluminum cap marked Union County Survey Marker or as noted.

**HORIZONTAL CONTROL DATA  
UNION COUNTY, OREGON  
OREGON STATE PLANE, NORTH ZONE (3601)**

STA NAME: 200125

CORNER COMMON TO: 13,18,19,24

TWP. 4 S. RGE. 40 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: 15 FEB. 2001

LAT: 45 ° 12 ' 34.96884 " N

SURVEYOR: GREGORY T. BLACKMAN  
OPLS 991

LONG: 117 ° 52 ' 14.14062 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 573576.729 INT FT.

E: 8879607.709 INT FT.

TYPE: GPS

THETA: 1 ° 51 ' 53.0551136 "


ORDER: SECOND CLASS: 1

SCALE FACTOR: 0.9998948376

ELEV: 2776.08 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:



Renewal Date: Dec. 31, 2001

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)