


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1, 1879. Surveyor General record states:

- Set stone 13x8x6 for cor to secs 5,6,31 and 32 from which;
- A fir 12 in dia bears N10°E 9 lks dist
- A fir 14 in dia bears S15E 9 lks dist
- A tamarack 16 in dia bears S60W 12 lks dist
- A fir 10 in dia bears N45°W 12lks dist

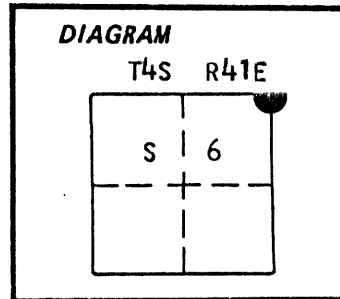

Corner was retraced by Alonzo Gesner under GLO contract number 683 dated June 7, 1898. Surveyor General record states; Found corner to secs 5,6,31 and 32 a stone 5x6x5 inches above ground from which; A fir 12 in diam bears N3°E 9 lks dist, A fir 14 in diam bears S8°E 9 lks dist, A tamarack 16 in diam bears S62°30'W 5 lks dist, A fir 10 in diam bears N45°W 12 lks dist.

After retracing this line, Mr. Gesner called the corner out of the acceptable limits for closure and returned to obliterate the BTs to the North and set a closing Corner East

Description of corner evidence found:

- Found a stone 14"x8"x6" with 5 grooves and 1 groove in a mound of stone.
- Found a stump hole that bears N 10° E, 9 lks.
- A 20 inch Fir dead and down, rotting with chop marks visible, bears S 15° E, 9 lks.
- Found a 22 inch Tamarack stump with bottom of blaze evident, bears S 60° W, 5 lks.
- Found a stump hole that bears N 45° W, 12 lks .

See map of survey number 29-86 filed in the office of the Union County Surveyor Description of monument and accessories I established to perpetuate the original location of this corner: At stone position I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown 28 inches in the ground and raised a mound of stone with a 3 foot base to top of cap, from which:

A 6 inch Tamarack bears S 60° E, 14.76 feet, marked X BT.


An 18 inch Double Bole White Fir bears S 54° W, 26.25 feet, marked T4S R41E S6 BT. A 50d spike is in the left root crown when facing tree.

Buried stone to the North of the cap.

Set a steel fence post approximately 5 feet East with a 54-9 sign attached.

Corner set : 8/27/86

Witness: Greg Blackman, Rick Robinson

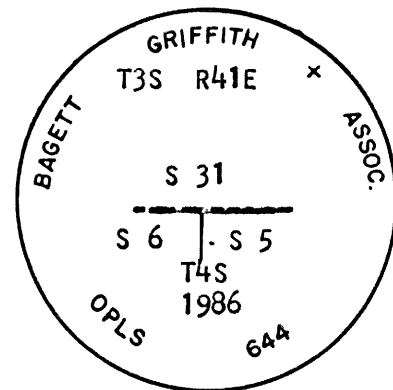

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of..... 19.....

UNION COUNTY SURVEYOR

(COUNTY OFFICIAL) (DEPUTY)

Date Received 10-20-86

Date Filed 10-27-86

By G. LANGLITZ DEPUTY

File No. 185-86 R

Form R6-7100-57 (9/71)

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

IV 7

Dependent Resurvey of a Portion of the North Boundary,
T. 4 S., R. 41 E., Willamette Meridian, Oregon

F E E T

From this point, the original closing cor. of secs. 31 and 32, T. 3 S., R. 41 E., perpetuated by Griffith in 1986, who found the original stone at this location and reported burying it alongside the aluminum pipe for the closing cor. of secs. 31 and 32, bears S. 0° 25' 24" E., 2.66 ft. dist., monumented with a 60d nail, with flagging, firmly set flush with surface of ground, from which the remains of an original bearing tree

A burned rotted stump, size indeterminate, bears N. 2 1/2° E., 31.0 ft. dist., with hack marks visible at the base.

At the corner point

Set an iron rod, 5/8 in. diam., 16 ins. long, 16 ins. in the ground. Dispose of the 60d nail.

N. 89° 40' 36" W., beginning new measurement

514.44

The cor. of secs. 5 and 6 only, remonumented by Griffith in 1986, recovered and utilized by Griffith in 1988 and by Blackman in 1988; monumented with an aluminum pipe, 2 1/2 ins. diam., firmly set, flush with surface of ground, in a collar of stone, with aluminum cap, 2 1/2 ins. diam., mkd.

T 3 S R 41 E
S 31

S 6 | S 5
T 4 S
1986

74541 A05

from which the remains of an original bearing tree

A rotted tamarack stump, 18 ins. diam., bears S. 60° W., 4.3 ft. dist., no marks visible. (Record, 7.9 ft.)

and bearing trees mkd. by Griffith

A tamarack, 12 ins. diam., bears S. 62 3/4° E., 14.8 ft. dist., with healed blazes at waist height and the base.

A double trunk fir, 22 ins. diam., bears S. 54° W., 26.2 ft. dist., with healed blazes at waist height and the base.

A metal fence post bears E., 5 ft. from the cor.

UNION COUNTY
SURVEYOR

Date Received 3/8/13

Date Filed 3/8/13

By [Signature]

File No. 199-2013R