


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not established in original survey

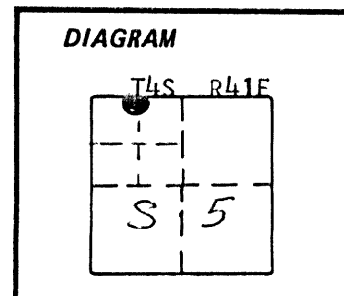

Description of corner evidence found:

NONE

UNION COUNTY SURVEYOR

Date Received 10-20-86

Date Filed 10-27-86

By G. LANGRIZ, DEPUTY

File No. 186-86R

See survey number 29-86 filed in the office of the Union County Surveyor

Description of monument and accessories I established to perpetuate the original location of this corner: At position determined by survey, I set a 2 1/2' x 30" aluminum pipe with aluminum cap marked as shown, 26 inches in the ground and raised a mound of stone with a 3 foot base to top of cap, from which:


A 6' x 8' x 4' high rock outcrop bears S 80° E, 9.21 feet, marked X B0.

A 5' x 8' x 5' high rock outcrop bears S 38° W, 21.89 feet, marked X B0.

Set a steel fence post approximately 5 feet East with a 54-9 sign attached.

Corner set 8/21/86

Witness: Greg Blackman, Rick Robinson, Greg Blackman Jr.

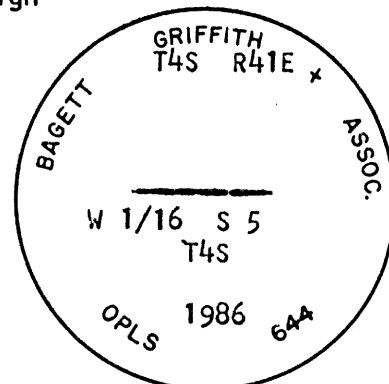

REGISTERED PROFESSIONAL LAND SURVEYOR

[Signature]

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

Dependent Resurvey of a Portion of the North Boundary,
T. 4 S., R. 41 E., Willamette Meridian, Oregon

FEET	
<p>UNION COUNTY SURVEYOR</p> <p>Date Received <u>3/8/13</u></p> <p>Date Filed <u>3/8/13</u></p> <p>By <u>[Signature]</u> Deputy</p> <p>File No. <u>200-2013R</u></p>	<p>449.37 The 1/4 sec. cor. of sec. 5 only, reestablished by Griffith in 1986, there is no remaining evidence of the original corner, therefore this point is accepted as the corner; monumented with an aluminum pipe, 2 1/2 ins. diam., firmly set, flush with surface of the ground, in a collar of stone, with aluminum cap, 2 1/2 ins. diam., mkd.</p> <p style="text-align: center;">T 3 S R 41 E</p> <p style="text-align: center;">1/4 ———</p> <p style="text-align: center;">S 5</p> <p style="text-align: center;">T 4 S</p> <p style="text-align: center;">1986</p> <p>From which the remains of bearing trees mkd. by Griffith</p> <p style="padding-left: 40px;">A fir snag, 14 ins. diam., bears S. 41° E., 28.3 ft. dist., with a healed blaze.</p> <p style="padding-left: 40px;">An uprooted lodgepole pine, 11 ins. diam., bears S. 55° W., 21.1 ft. dist., with two burned out blazes and scribe marks BT visible in the lower blaze.</p> <p>and new bearing objects</p> <p style="padding-left: 40px;">A rock outcrop, 2 x 3 x 1/2 ft. high, bears S. 22 1/4° E., 85.3 ft. dist., mkd. X BO.</p> <p style="padding-left: 40px;">A rock outcrop, 3 x 2 x 2 ft. high, bears S. 32° W., 60.4 ft. dist., mkd. X BO.</p> <p>Corner is located in a burned, logged area.</p> <p style="padding-left: 40px;">N. 89° 36' 36" W., beginning new measurement.</p> <p>1120 Potters Creek, 20 ft. wide, extending N. 51° E., drains S. 21° W.</p> <p>1322.43 The W 1/16 sec. cor. of sec. 5 only, established by Griffith in 1986, and is accepted as the corner; monumented with an aluminum pipe, 2 1/2 ins. diam., firmly set, flush with surface of the ground, in a collar of stone, with aluminum cap, 2 1/2 ins. diam., mkd.</p> <p style="text-align: center;">T 3 S R 41 E</p> <p style="text-align: center;">W 1/16 ———</p> <p style="text-align: center;">S 5</p> <p style="text-align: center;">T 4 S</p> <p style="text-align: center;">1986</p> <p>from which accessories mkd. by Griffith</p>

Dependent Resurvey of a Portion of the North Boundary,
T. 4 S., R. 41 E., Willamette Meridian, Oregon

FEET

A rock outcrop, 6 x 8 x 4 ft. high, bears S. 80° E.,
9.2 ft. dist., with X B0 visible on deteriorated face.

A rock outcrop, 5 x 8 x 4 ft. high, bears S. 36° W.,
21.9 ft. dist., with X B0 visible on deteriorated face.

A metal fence post bears E., 4 ft. from the cor.

N. 89° 39' 59" W., beginning new measurement.

475 Dirt road, 10 ft. wide, bears N. 12° E. and S. 10° E.

806.37 The closing cor. of secs. 31 and 32, on the S bdy. of T. 3 S.,
R. 41 E., established by Griffith in 1986, recovered and
utilized by Griffith in 1988 and by Blackman in 1988, and is
accepted as the corner; monumented with an aluminum pipe, 2 1/2
ins. diam., firmly set, projecting 2 ins. above ground, in a
collar of stone, with aluminum cap, 2 1/2 ins. diam., mkd.

AM
T 3 S R 41 E
CC
S 31 | S 32
S 5
T 4 S
1986

from which the remains of bearing trees mkd. by Griffith

An uprooted dead and down lodgepole pine, 10 ins. diam.,
bears N. 20° E., 2.7 ft. dist., with scribe marks CC S32
at waist height and BT at base visible on open blazes
with nail and flasher at base.

An uprooted dead and down lodgepole pine, 9 ins. diam.,
bears N. 62° W., 4.7 ft. dist., with scribe marks CC S31
at waist height and BT at base visible on open blazes
with nail and flasher at base.

and new bearing trees

A lodgepole pine, 8 ins. diam., bears N. 42° E.,
30.9 ft. dist., mkd. T3S R41E S32 CC BT.

A white fir, 6 ins. diam., bears N. 31° W.,
17.0 ft. dist., mkd. T3S R41E S31 CC BT.

Remove the marks AM from cap and add the marks BLM 2008.

A metal fence post bears E., 3.5 ft. from the cor.

UNION COUNTY
SURVEYOR

Date Received 3/8/13

Date Filed 3/8/13

By J. L. Deaton

File No. 200-201312