

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1, 1879. Surveyor General record states:

Set stone 11x9x7 for 1/4 sec cor
Raised mound of stone at corner


Corner was retraced by Alonzo Gesner under GLO contract number 683 dated June 7, 1898. Surveyor General record states;

Found stone 3x6x5 marked and witnessed as stated by the Surveyor General

No record of subsequent remonumentation found in county record.

Description of corner evidence found:

NONE

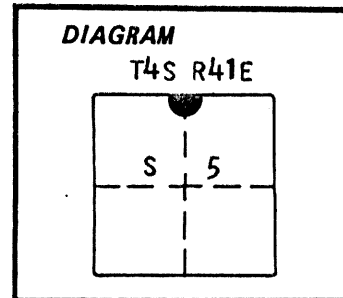

**UNION COUNTY
SURVEYOR**

Date Received 10-20-86
 Date Filed 10-27-86
 By G. LANGLITZ DEPUTY
 File No. 187-86 R

See map of survey number 29-86 as recorded in the office of the Union County Surveyor
Description of monument and accessories I established to perpetuate the

original location of this corner: At proportionate position I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 26" in the ground and raised a small mound of stone around cap; from which:


A 12 inch Douglas Fir bears S 41° E, 28.45 feet, marked 1/4 S 5 BT.

A 10 inch Lodgepole Pine bears S 58° W, 21.00 feet, marked 1/4 S 5 BT.

Set a steel fence post approximately 5 feet West with a 54-9 sign attached.

Date Set: 8/14/86

Witness: Greg Blackman, Rick Robinson

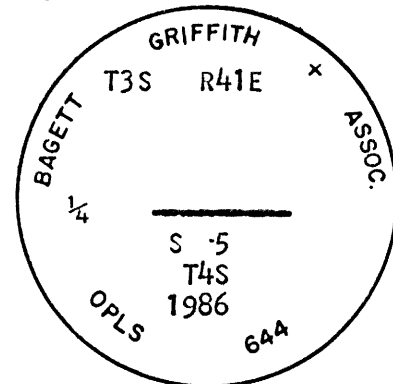

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Duane I. Griffith
**OREGON
JULY 10, 1984
DUANE I. GRIFFITH
644**

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

..... by

(COUNTY OFFICIAL)

(DEPUTY)

Dependent Resurvey of a Portion of the North Boundary,
T. 4 S., R. 41 E., Willamette Meridian, Oregon

FEET

449.37

The 1/4 sec. cor. of sec. 5 only, reestablished by Griffith in 1986, there is no remaining evidence of the original corner, therefore this point is accepted as the corner; monumented with an aluminum pipe, 2 1/2 ins. diam., firmly set, flush with surface of the ground, in a collar of stone, with aluminum cap, 2 1/2 ins. diam., mkd.

T 3 S R 41 E

1/4 ———

S 5

T 4 S

1986

T4S41 A07

From which the remains of bearing trees mkd. by Griffith

A fir snag, 14 ins. diam., bears S. 41° E., 28.3 ft. dist., with a healed blaze.

An uprooted lodgepole pine, 11 ins. diam., bears S. 55° W., 21.1 ft. dist., with two burned out blazes and scribe marks BT visible in the lower blaze.

and new bearing objects

A rock outcrop, 2 x 3 x 1/2 ft. high, bears S. 22 1/4° E., 85.3 ft. dist., mkd. X BO.

A rock outcrop, 3 x 2 x 2 ft. high, bears S. 32° W., 60.4 ft. dist., mkd. X BO.

Corner is located in a burned, logged area.

N. 89° 36' 36" W., beginning new measurement.

1120

Potters Creek, 20 ft. wide, extending N. 51° E., drains S. 21° W.

1322.43

The W 1/16 sec. cor. of sec. 5 only, established by Griffith in 1986, and is accepted as the corner; monumented with an aluminum pipe, 2 1/2 ins. diam., firmly set, flush with surface of the ground, in a collar of stone, with aluminum cap, 2 1/2 ins. diam., mkd.

T 3 S R 41 E

W 1/16 ———

S 5

T 4 S

1986

T4S41A06

from which accessories mkd. by Griffith

UNION COUNTY
SURVEYOR

Date Received 3/8/13

Date Filed 3/8/13

By [Signature] DEPUTY

File No. 201-2013R