


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1, 1879. Surveyor General record states:

Set a black pine post 4½ ft long 4 in dia for cor to secs 4,5,32 and 33 from which; A black pine 6 in dia bears N70°E 15 lks dist A black pine 7 in dia bears S80°E 12 lks dist, A black pine 6 in dia bears S50°W 20 lks dist, a black pine 6 in dia bears N62W 10 lks dist.

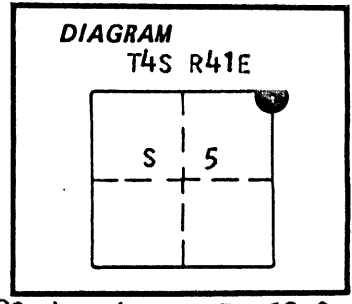

Corner was retraced by Alonzo Gesner under GLO contract number 683 dated June 7, 1898 Surveyor General record states: Found post greatly decayed. I destroyed and set a pine post 5 ft long 4 inches sq 24 inches in the ground from which; A black pine 6 in dia bears N70°E 15 lks dist, A black pine 7 in dia bears S80°E 12 lks dist, A black pine 6 in dia bears S80°W 20 lks dist. The other tree had fallen down, I marked a black pine 8 in dia bears N18°W 7 lks dist. After retracing this line, Mr. Gesner called the corner out of acceptable limits for closure and returned to obliterate the BTs to the

Description of corner evidence found: North and set a closing corner to the East
S.E. BT. a Black Pine root hole with a burnt root ball. No scribing visible. BT. bears S 80° E 12 lks.

BT. A burnt Black Pine root ball, no scribes visible bears N 70° E 15 lks.

BT. A Black Pine stump, dead and down, blaze evident, no scribes visible, bears N 18° W, 7 lks.

From the found BTs I scraped the ground and found the remains of a burnt post tip and discolored dirt for the original post corner.

See map of survey number 29-86 filed with the Union County Surveyor.

Description of monument and accessories I established to perpetuate the original location of this corner: At the post position I set a 2½"x30" aluminum pipe with aluminum cap marked as shown, 28" in the ground, from which:

A 12" Lodge pole Pine bears S 70° E, 40.40 feet, marked T4S R41E S 4 BT.


An 8" Lodgepole Pine bears S 5° W, 16.79 feet, marked T4S R41E S 5 BT.

Set a steel fence post approximately 5 feet East with a 54-4 sign attached.

Corner set 8/11/86.

Witness: Greg Blackman

UNION COUNTY SURVEYOR
Date Received 10-20-86
Date Filed 10-27-86
By G. LANGRISH DEPUTY
File No. 188-86 R

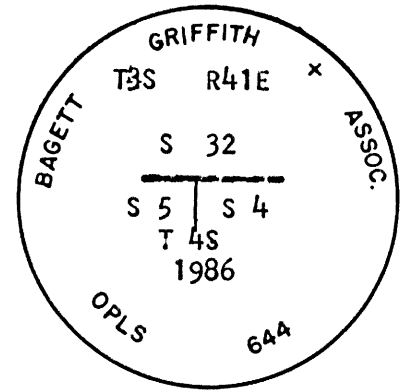

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)

T. 4 S., R. 41 E., Willamette Meridian, Oregon

FEET

The terrestrial measured distances and directions have been adjusted by computer software that incorporates a least squares adjustment routine. An analysis of the unadjusted field data assured a closure not exceeding 1:4000 in error. The adjusted bearings and distances are reported to the nearest second and 0.01 foot.

Each new bearing tree has a 2 1/2 inch x 1/4 inch magnetic nail (Mag Nail) driven at the base on right side center, unless otherwise noted in the corner description.

The geographic position (NAD 1983 (CORS 96)) of the corner of sections 4 and 5 only, on the north boundary of T. 4 S., R. 41 E., as determined by direct GPS occupation utilizing dual frequency, carrier phase GPS receivers, and processed using the National Geodetic Survey's Online Positioning User Service (OPUS), is as follows:

Latitude: 45° 15' 07.17" N. Longitude: 117° 42' 16.96" W.

Dependent Resurvey of a Portion of the North Boundary, T. 4 S., R. 41 E., Willamette Meridian, Oregon

(Restoring the survey by Henry M. Thatcher in 1879 and the resurvey by Alonzo Gesner in 1898)

Beginning at the cor. of secs. 4 and 5 only, remonumented by Griffith in 1986; monumented with an aluminum pipe, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with aluminum cap, 2 1/2 ins. diam., mkd.

T 3 S R 41 E
S 32

S 5 | S 4
T 4 S
1986

from which the remains of an original bearing tree

A rotted pine stump, size indeterminate, bears N. 38° W., 2.7 ft. dist., no marks visible, and a BT tag in the rotted remains. (Record, N. 18° W., 4.6 ft.)

and bearing trees mkd. by Griffith

A lodgepole pine, 11 ins. diam., bears S. 70° E., 40.3 ft. dist., with scribe marks 4S R41E S4 at waist height and BT at base visible on open blazes.

UNION COUNTY SURVEYOR

Date Received 3/8/12

Date Filed 3/8/13

By [Signature] Deputy

File No. 202-2013R

Dependent Resurvey of a Portion of the North Boundary,
T. 4 S., R. 41 E., Willamette Meridian, Oregon

FEET

A lodgepole pine, 9 ins. diam., bears S. 5° W., 16.7 ft. dist., with scribe marks 4S R41E S5 at waist height and BT at base visible on open blazes.

Reset a metal fence post 5 ft. E. of cor.

Corner is located W., 100 ft. dist., from a dirt road, 11 ft. wide, bears N. 35° E. and S. 35° W.

From this corner, the closing cor. of secs 32 and 33, on the S. bdy. of T. 3 S., R. 41 E., established by Griffith in 1986, and is accepted as the corner, bears N. 89° 41' 52" E., 384.68 ft. dist.; monumented with an aluminum pipe, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with aluminum cap, 2 1/2 ins. diam., mkd.

UNION COUNTY SURVEYOR	
Date Received	<u>3/8/13</u>
Date Filed	<u>3/8/13</u>
By	<u>[Signature] DEPUTY</u>
File No.	<u>202-2013R</u>

AM
T 3 S R 41 E
CC
S 32 | S 33
S 4
T 4 S
1986

From which bearing trees mkd. by Griffith

An uprooted pine, 8 ins. diam., bears N. 43 3/4° E., 15.3 ft. dist., with scribe marks CC S33 at waist height and BT at base visible on open blazes and with a nail and flasher mkd. OPLS 644.

An uprooted pine, 8 ins. diam., bears N. 14 3/4° W., 24.7 ft. dist., with scribe marks CC S32 at waist height and BT at base visible on open blazes and with a nail and flasher mkd. OPLS 644.

and bearing trees mkd. by person(s) unknown

A white fir, 6 ins. diam., bears N. 45 1/2° E., 37.3 ft. dist., with scribe marks X at breast height and BT at base visible on open blazes.

A lodgepole pine, 9 ins. diam., bears N. 37 1/2° W., 55.4 ft. dist., with scribe marks T3S R41E S32 CC BT visible on open blaze.

Remove the marks AM from cap and add the marks BLM 2008.

From this corner, the original closing cor. of secs 32 and 33, on the S. bdy. of T. 3 S., R. 41 E., perpetuated by Griffith in 1986, who found the original stone at this location and reported burying it alongside the aluminum pipe for the closing cor. of secs. 32 and 33, bears S. 0° 21' 14" E., 5.60 ft. dist.;