


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1, 1879. Surveyor General record states:

Set a black pine post 4 ft long 4 in. in dia for 1/4 sec cor from which:

- A black pine 5 in dia bears N12°W 10 lks dist
- A black pine 5 in dia bears S35°E 18 lks dist



No record of subsequent remonumentation found in County records. Description of corner evidence found:

None.

**UNION COUNTY SURVEYOR**

---

Date Received 10-20-86

Date Filed 10-27-86

By G. LANGLIR, DEPUTY

File No. 196-86 R

See map of survey number 29-86 as recorded in the office of the Union County Surveyor Description of monument and accessories I established to perpetuate the original location of this corner: At proportionate position, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground; from which;


A 6 inch Lodgepole Pine bears N 24° E, 16.25 feet, marked X BT.

A 6 inch Tamarack bears S 40° W, 29.12 feet, marked X BT.

Set a steel fence post approximately 5 feet North with a 54-4 sign attached.

Corner set: 8/12/86

Witness: Greg Blackman, Rick Robinson

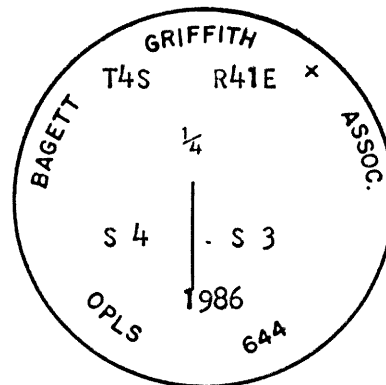

**REGISTERED PROFESSIONAL LAND SURVEYOR**

*Handwritten signature of Duane I. Griffith*

OREGON  
JULY 10, 1964  
**DUANE I. GRIFFITH**  
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)