


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1, 1879. Surveyor General record states:

Set black pine post 4 ft long 4 in. in dia for 1/4 sec cor from which:

- A black pine 6 in dia bears N8°W 4 lks dist
- A black pine 7 in dia bears S33°E 10 lks dist

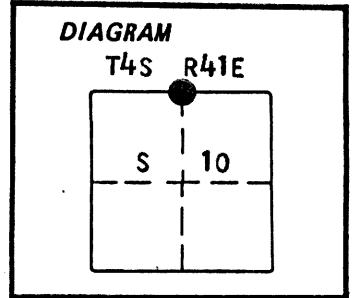

No record of subsequent remonumentation found in county records.

Description of corner evidence found:

Remains of Lodgepole Pine bears S 33° E, 10 lks, dead and down, rotting, with ax marks visible.

A 7 inch Lodgepole Pine bears N 8° W, 4 lks. Dead and standing with scribes visible.

Description of monument and accessories I established to perpetuate the

original location of this corner: At record bearing and distance from bearing trees, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which:


A 10 inch Lodgepole Pine bears S 39° E, 54.41 feet, marked 1/4 S 10 BT.

An 18 inch Tamarack bears N 63° W, 59.78 feet, marked 1/4 S3 BT.

Set a steel fence post approximately 5 feet West with a 54-9 sign attached.

Corner set; 9/12/86

Witness: Greg Blackman, Rick Robinson

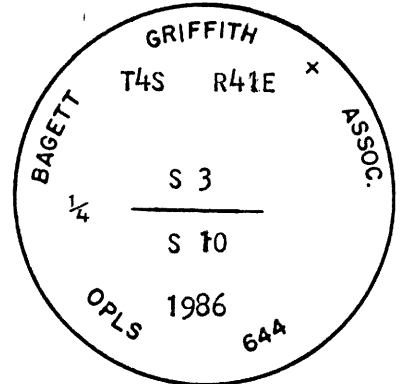

REGISTERED PROFESSIONAL LAND SURVEYOR

Handwritten signature of Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of..... 19.....

(COUNTY OFFICIAL) UNION COUNTY SURVEYOR (DEPUTY)

Form R6-7100-57 (9/71)

Date Received 10-20-86

Date Filed 10-27-86

By G. LANGLITZ DEPUTY

File No. 203-86R

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

VI-9