


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1, 1879. Surveyor General record states:

Set stone 13"x8"x7" in a mound of stone for 1/4 section corner to sections 9 and 16.

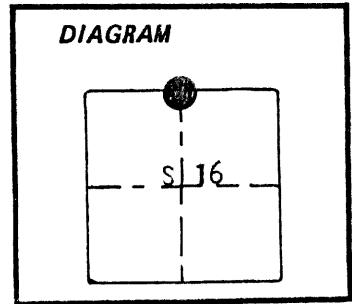

No record of subsequent remonumentation found in the county records.  
Description of corner evidence found:

Stone 13"x8"x7" with dim marks, in a mound of stone.

**UNION COUNTY SURVEYOR**

---

Date Received 10-20-86  
 Date Filed 10-27-86  
 By G. LANGRISH DEPUTY  
 File No. 210-86 R

See map of survey number 29-86 filed in the office of the Union County Surveyor  
Description of monument and accessories I established to perpetuate the

original location of this corner: At the stone position, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground and raised a mound of stone with a 4 foot base to top of cap, from which:

A 6 inch Tamarack bears S 50° E, 16.63 feet, marked 1/4 S16 BT.

A 9 inch Ponderosa Pine bears N 76° W, 34.70 feet, marked 1/4 S9 BT.


Set a steel fence post approximately 5 feet North with a 54-2 and 54-4 sign attached.

Set a steel fence post approximately 5 feet East with a 54-2 sign attached.

Buried stone south of Cap.

Corner set: 8/28/86

Witness: Greg Blackman, Rick Robinson

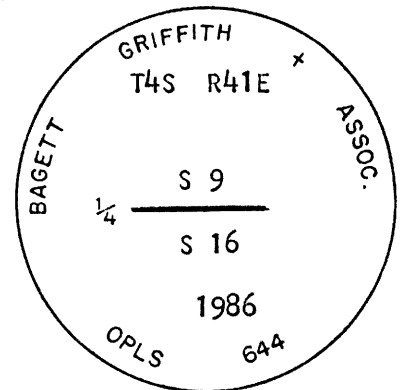

Brass washer marked OPLS 644 nailed to BT. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

**REGISTERED PROFESSIONAL LAND SURVEYOR**

*Handwritten signature of Duane I. Griffith*

OREGON  
JULY 10, 1964  
**DUANE I. GRIFFITH**  
644

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....  
..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

II-14