

Sec Cor 17, 18, 19, 20 4S 41E } N-5
Stone 46 x 12 x 6" Found. No
BTs No marks on stone.

1/4 Cor 17-20 4S 41E.
Pine Stump fd w/ Axe Blaze.
Apparently lower edge of BT
Blaze. Evidence Rd of
Tamarack down & rotted.
No stone Rd. in place.

1/4 Cor Between 8 + 9 5S
41E
1 BT Fd. - on down
rotted Pine. Apparently
on East side of corner.

UNION COUNTY SURVEYOR	
Date Received	<u>1-4-88</u>
Date Filed	<u>1-7-88</u>
By	<u>G. LANGLITZ, DEPUTY</u>
File No.	<u>05-88R</u>

N-5

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established by Henry M. Thatcher under GLO Contract Number 320, dated April 1, 1879. Surveyor General field notes state:

Set Stone 46x12x6 for Cor. to Secs. 17.18.19.+20.
Raised Stone Mound at Cor.

Corner found by J.W. Kimbrell on survey dated July 13, 1888. Filed as survey number 41, page 81 of Old Book of Union County surveys. His notes give no description, and only reference the section corner to 17, 18, 19, and 20.

T 4 S R 41 E N-05



DESCRIPTION OF CORNER EVIDENCE FOUND:

None

See Survey Number 047-2015

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by survey, I set a 2½" x 30" aluminum pipe 10" in the ground, to root, marked as shown below, with mound of stone 2 feet base to top of cap. From which:

NEW BEARING TREES:

A 6" Western Larch bears North 34°East, a distance of 34.10 feet, marked T4S R41E S17 BT.
An 8" Douglas Fir bears South 11° East, a distance of 14.45 feet, marked T4S R41E S20 BT.
A 9" Ponderosa Pine bears South 45° West, a distance of 2.00 feet, marked T4S R41E S19 BT.
A 7" Douglas Fir bears North 5° West, a distance of 48.75 feet, marked T4S R41E S18 BT.

I set a steel fencepost approx. 2 feet North of corner monument.


I hereby certify that this corner was monumented on July 15, 2015.

Witness: Thomas J. Kopp

REGISTERED
PROFESSIONAL
LAND SURVEYOR

[Signature]
OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2017

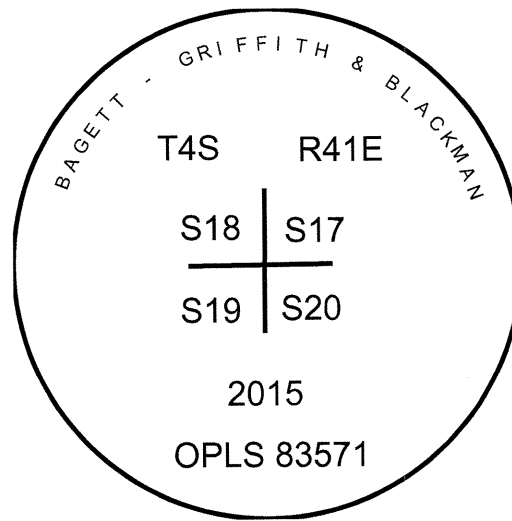

**UNION COUNTY
SURVEYOR**
Date Received 7/28/15
Date Filed 7/28/15
Filed By [Signature]
File Number 129-2015R

I used a steel tape and magnetic compass in the establishment of the new bearing trees. I used 16° East declination, the distances are to a 60d spike driven into the right side of the root crown of the new bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.