


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1, 1879. Surveyor General record states:

Set stone 15x11x9 for 1/4 sec cor from which:

- A spruce 12 in dia bears N60°E 8 lks dist
- A black pine 13 in dia bears S26°E 10 lks dist



No record of subsequent monumentation found in county records

Description of corner evidence found:

Found a stone 15x9x8 inches with faint marks

- Found a 24 inch diameter spruce stump N60°E 8 lks cut too low to see blaze or scribes
- Found a 12 inch diameter Lodgepole Pine S26°E 10 lks dead down rotting with scribes visible


Description of monument and accessories I established to perpetuate the original location of this corner: In place of stone, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown 28 inches in the ground from which:

New BTs

- A 11 inch diameter Spruce bears N89°E 18.36 feet marked 1/4 S15 BT
- A 21 inch diameter Tamarack bears S44°W 36.45 feet marked 1/4 S22 BT

Buried the original stone South and alongside of monument
Set steel fencepost approximately 5 feet East with 54-9 sign attached

Corner monumented June 19, 1986
Witnesses: Greg Blackman and Rick Robinson

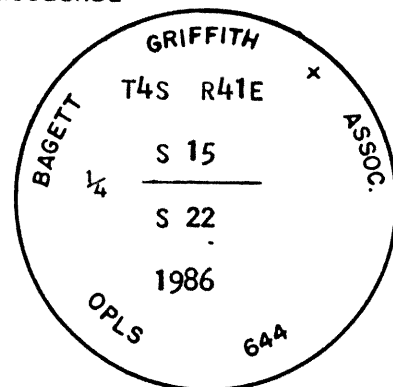

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

(COUNTY OFFICIAL) **UNION COUNTY SURVEYOR** (DEPUTY)

Form R6-7100-57 (9/71)

Date Received 7-28-86
 Date Filed 8-19-86
 By G. LANSBUR DEPUTY
 File No. 110-86 R

U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276