


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:  
Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1, 1879. Surveyor General record states:

Set stone 11x11x9 for 1/4 sec cor  
Raised stone mound at cor

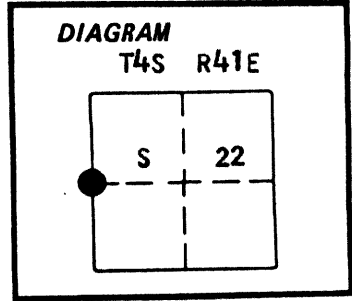

No subsequent remonumentation found in County Records.  
Description of corner evidence found:

NONE

**UNION COUNTY SURVEYOR**

---

Date Received 7-28-86  
Date Filed 8-19-86  
By G. LANGLITZ DEPUTY  
File No. 111-86 R

Description of monument and accessories I established to perpetuate the original location of this corner: At proportionate position I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 26" in the ground and raised a mound of stone with a 2 foot base to top of cap from which:


A 15 inch Douglas Fir bears N 37° E, 72.63 feet, marked 1/4 S 22 BT.

A 19 inch Tamarack bears N 84° W, 20.59 feet, marked 1/4 S 21 BT.

I set a steel fence post approximately 5 feet North with a 54-2 and 54-9 sign attached.

I set a steel fence post approximately 5 feet South with a 54-2 sign attached.

Corner set 7/18/86  
Witness: Greg Blackman, Rick Robinson

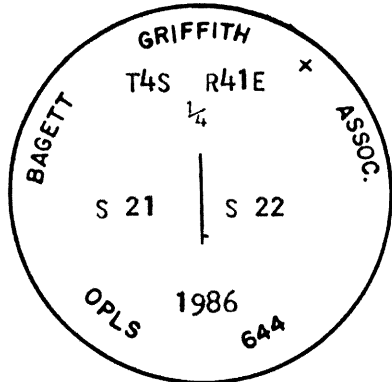

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.



Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....  
..... by .....  
(COUNTY OFFICIAL) (DEPUTY)