


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1, 1879. Surveyor General record states:

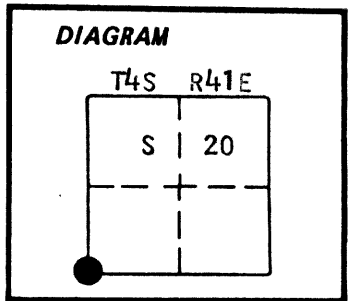

Set stone 18x12x6 for cor to secs 19,20,29 and 30
Raised stone mound at cor

Corner was found in 1888 by J.W. Kimbrell, Union County Surveyor

No record of subsequent monumentation found in county records

Description of corner evidence found:

Found stone 18x8x8 inches with dim grooves (unable to establish an exact count) in mound of stone

Found the following unrecorded bearing trees;

- A 41 inch diameter Red Fir bears S55°E 99.5 feet live but sickly, I opened and found \$ 20 scribes visible and the BT blaze evident
- A 24 inch diameter P.Pine stump S16°W 76.1 feet rotted with BT scribe visible
- A 30 inch diameter P.Pine stump N54°W 48.4 feet rotted with BT scribe visible

These trees all face the mound of stone. A ring count on the live tree indicated they were taken at approximately the time Mr. Kimbrell was in the area, although there is no record of him ever taking bearing trees.

Description of monument and accessories I established to perpetuate the original location of this corner: In place of stone and at the facing of the unrecorded bearing trees, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 15 inches in the ground with mound of stone 3 ft base to top of cap from which:


New BTs

- A 20 inch diameter double bole P.Pine bears N39°E 36.23 feet marked T4S R41E S20 BT
- A 14 inch diameter P.Pine bears S72°E 47.58 feet marked T4S R41E S29 BT
- A 13 inch diameter P.Pine bears S24°W 46.60 feet marked T4S R41E S30 BT
- A 23 inch diameter double bole P.Pine bears N45°W 86.51 feet marked T4S R41E S19 BT

Buried the original stone South and alongside of monument

Corner monumented July 15, 1986

Witnesses: Greg Blackman and Rick Robinson

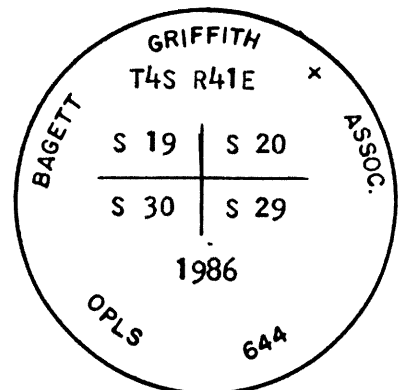

REGISTERED PROFESSIONAL LAND SURVEYOR

Handwritten signature of Duane I. Griffith
OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of..... 19.....

(COUNTY OFFICIAL)

UNION COUNTY SURVEYOR

(DEPUTY)

Form R6-7100-57 (9/71)

Date Received 7-28-86

Date Filed 8-19-86

By G. LANGRISH DEPUTY

File No. 112-86 R

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276