


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1879. Surveyor General record states:

Set stone 13"x9"x7" for 1/4 section corner. Raised mound of stone at corner.

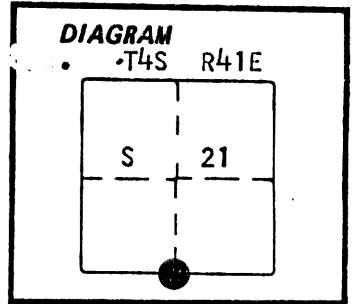

No record of subsequent remonumentation found in county records.

Description of corner evidence found:

Found a stone 12"x10"x6" marked 1/4 in a mound of stone.

**UNION COUNTY SURVEYOR**

---

Date Received 10-20-86

Date Filed 10-27-86

By G. LANGLITZ, DEPUTY

File No. 256-86 R

See map of survey number 31-86 filed in the office of the Union County Surveyor

Description of monument and accessories established to perpetuate the

original location of this corner: At stone position I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 26" in the ground and raised a mound of stone with a 4 foot base to top of cap; From which;


A 16" Ponderosa Pine bears N 32° E, a distance of 56.46 feet, marked 1/4 S 21 BT.

A 10 inch Double bole Tamarack bears S 41° W, a distance of 36.70 feet, marked 1/4 S 28 BT.

Set a steel fence post approximately 5 feet West with a 54-9 sign attached.

Buried stone north of cap.

Witness: Rick Robinson Greg Blackman  
Corner set 9/16/86

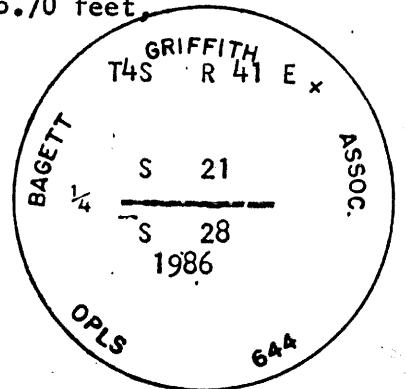

Brass washer marked OPLS 644 nailed to BT Blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d Spikeset in right side of tree when facing tree, unless otherwise stated.

REGISTERED PROFESSIONAL LAND SURVEYOR

*Duane I. Griffith*

OREGON  
JULY 10, 1964  
DUANE I. GRIFFITH  
644

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by .....

(COUNTY OFFICIAL)

(DEPUTY)