


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1, 1879. Surveyor General record states:

Set stone 14x10x6 for cor to secs 22,23,26 and 27
Raised stone mound at cor

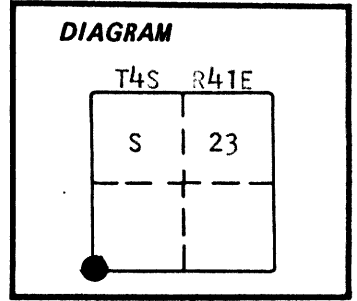

No record of subsequent monumentation found in county records

Description of corner evidence found:

Found a stone 14x9x5 inches marked with 2 grooves on the South and East sides and marked with 4 grooves on the North and West sides, firmly set in a mound of stone

UNION COUNTY SURVEYOR
Date Received 7-28-86
Date Filed 8-19-86
By G. LANGLITZ, DEPUTY
File No. 114-86R


Description of monument and accessories I established to perpetuate the original location of this corner: In place of stone, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 22 inches in the ground with mound of stone 3 ft. base to top of cap from which:

New BTs

- A 11 inch diameter P.Pine bears N31°E 12.55 feet marked T4S R41E S23 BT
- A 42"x36"x48" high rock outcrop bears S18°E 4.26 feet marked X B0
- A 16 inch diameter Tamarack bears S39°W 106.25 feet marked T4S R41E S27 BT
- A 16 inch diameter Tamarack bears N51°W 36.91 feet marked T4S R41E S22 BT

Buried the original corner stone North and alongside of monument
Set steel fencepost approximately 5 feet North with 54-4 sign

Corner monumented July 2, 1986
Witnesses; Greg Blackman and Rick Robinson

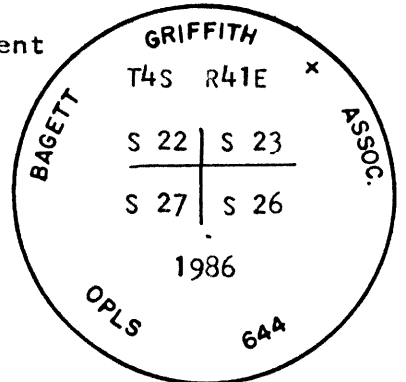

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by

(COUNTY OFFICIAL)

(DEPUTY)