

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by GLO Contract number 235 by John H. Stone dated July 6, 1875. GLO Record states:

Set stone 18x16x10 as per instructions for cor to Secs 36 and 25

Survey number 29-88 places the corner position by proportion, but did not set a monument.

No record of subsequent monumentation found in UNION COUNTY survey records.

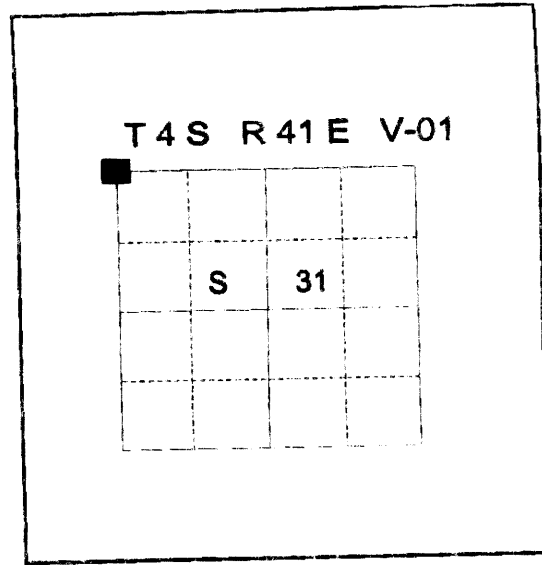

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found no evidence of the original GLO Corner monument. See Survey Number 031-2000.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by survey number 031-2000, I set a 2½"x30" aluminum pipe with aluminum cap marked as shown below, 29" in the ground, from which:

NEW BEARING TREES:

A 11" diameter Ponderosa Pine North 65° East, a distance of 53.22 feet marked T4S R41E S30 BT.



A 11" diameter Ponderosa Pine South 84° East, a distance of 78.30 feet marked T4S R41E S31 BT.

A 10" diameter Ponderosa Pine South 23° West, a distance of 181.75 feet marked T4S R40E S36 BT.)

A 8" diameter Ponderosa Pine North 39° West, a distance of 73.75 feet marked X BT.

Set a steel fence post approximately 1 feet North of the monument.

I hereby certify that the corner was perpetuated on October 5, 2000. Witnesses: Norbert Volny and Greg Blackman Jr.

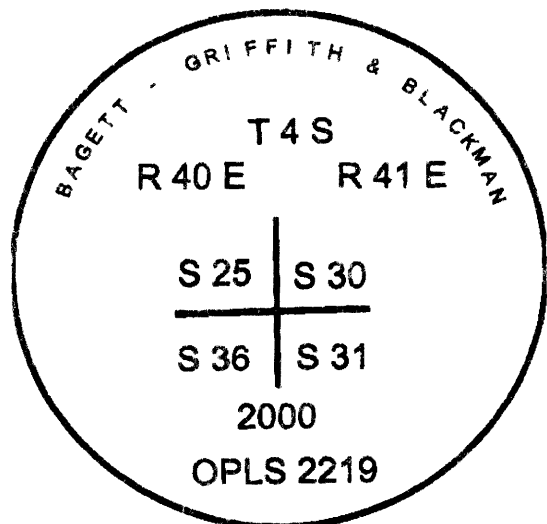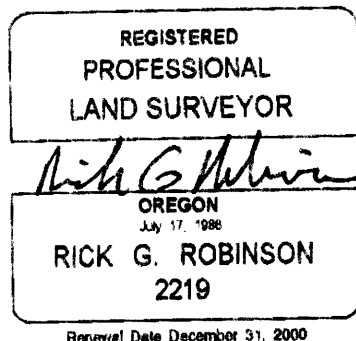

UNION COUNTY SURVEYOR

Date Received 10/10/2000

Date Filed 10/31/2000

Filed By Greg T. Blackman

File Number 030-2001R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 17° East magnetic declination. The distances to the Bts are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 2219 to the BT blaze.

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 201026

SECTION CORNER COMMON TO SECTIONS 25,36,30 AND 31, RANGES 40 AND 41

TWP. 4 S. RGE. 40/41 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: OCTOBER 22, 2010

LAT: 45 ° 10 ' 48.03807 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 117 ° 44 ' 52.40663 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 563806.894 INT FT.

E: 8911581.170 INT FT.

TYPE: GPS

THETA: 1 ° 57 ' 6.3 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.999894602

ELEV: 3931.66 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is 2 1/2" aluminum pipe with aluminum cap marked as shown

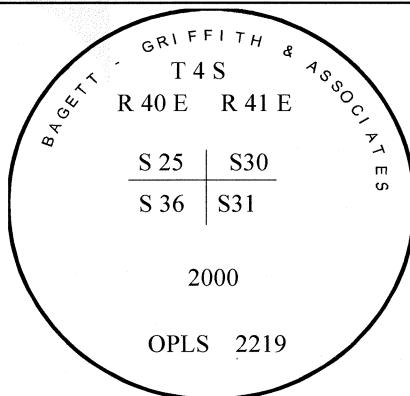

Renewal Date: December 31, 2010

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)