


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**  
Corner not previously established.

T 4S R 41 E V-06

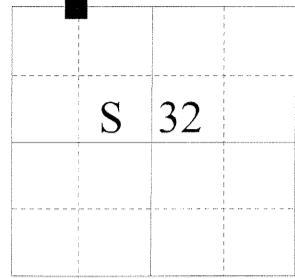

**DESCRIPTION OF CORNER EVIDENCE FOUND:**  
None

See Survey Number 031-2012

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At position determined by survey, I set a 5/8"x30" iron pin with 2 1/2" aluminum cap, 30 inches in the ground, from which:

A 9 inch Ponderosa Pine bears South 42° West, a distance of 16.25 feet, marked W 1/16 S32 BT.

A 7 inch Ponderosa Pine bears North 46° West, a distance of 44.80 feet, marked W 1/16 S29 BT.


I set a steel fencepost 1 foot North of the corner monument.

I hereby certify that the corner was monumented on September 24, 2012.

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Jeffery S. Hsu*  
**OREGON**  
June 2, 2010  
**JEFFERY S. HSU**  
83571

Renewal Date: June 30, 2013

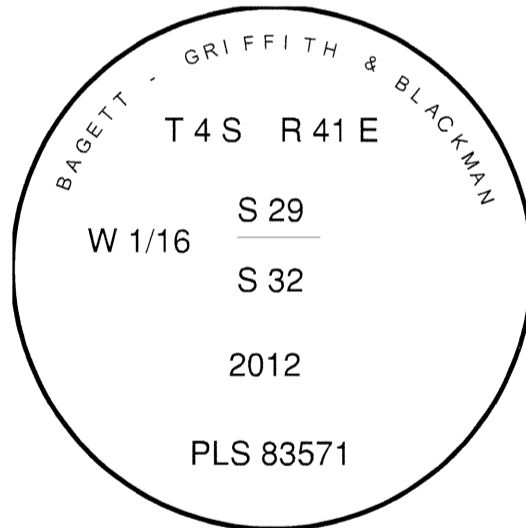

**UNION COUNTY  
SURVEYOR**

Date Received 9/28/12

Date Filed 9/28/12

Filed By R. ROBINSON, DEPUTY

File Number 039-2012R

I used a steel tape and magnetic compass in the establishment of the accessories. I used 16° East declination, the distances are to a 60d spike driven into the root crown at the right side of the bearing trees. I place a brass washer marked OPLS 83571 in the lower blaze of the new accessories.