

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

V-13

83

*already have
just file
PM*

FIELD NOTES

OF THE

REMONUMENTATION OF CERTAIN ORIGINAL CORNER POINTS,

TOWNSHIP 4 SOUTH, RANGE 41 EAST,

Of the WILLAMETTE Meridian,
In the State of OREGON

EXECUTED BY

Stephen D. Albright, Cadastral Surveyor

Under special instructions dated May 3, 19 57, which provided for the surveys
included under Group Number 350, approved May 6, 1957
and assignment instructions dated September 20, 19 71.

Survey commenced October 4, 19 71

Survey completed October 4, 19 71

T. 4 S., R. 41 E., Willamette Meridian, Oregon

CHAINS

The following field notes describe the remonumentation of certain original corner points, township 4 south, range 41 east, Willamette Meridian, Oregon, as provided for in the General Special Instructions, Group Number 350 Oregon, dated May 3, 1957, "Investigation of Collateral or Physical Evidence of Corner Positions and Accessories, Followed by Remonumentation of Corner Points, with New Accessories when Needed".

The remonumentation of original corner points was made at the request of the United States Forest Service, in conjunction with their Land Line Location Program.

The mean magnetic declination is 20° E.

South Boundary, T. 4 S., R. 41 E.,
Willamette Meridian, Oregon

(Remonumenting a corner established by Henry M. Thatcher, Deputy Surveyor, in 1879)

The 1/4 sec. cor. of secs. 3 and 34, on the S. bdy. of the Tp., determined at record bearing and distance from the only remaining original bearing tree:

A fir snag, 34 ins. diam., bears N. 25° W., 20 lks. dist., with scribe marks BT visible on open blaze.

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T 4 S R 41 E
1/4 S 34
S 3
T 5 S
1971

from which new bearing trees

A fir, 12 ins. diam., bears N. 2° W., 50 lks. dist., mkd. 1/4 S34 BT.

A white fir, 12 ins. diam., bears S. 84 1/2° W., 74 lks. dist., mkd. 1/4 S3 BT.

Set 5 ft. steel fence post alongside iron post.

Subdivision, T. 4 S., R. 41 E.,
Willamette Meridian, Oregon

(Remonumenting corners established by Henry M. Thatcher, Deputy Surveyor, in 1879)

The cor. of secs. 27, 28, 33, and 34, determined at record bearing and distance from the remains of the original bearing trees:

A root hole, bears N. 50° E., 28 lks. dist.

UNION COUNTY
SURVEYOR

Date Received 9-12-83

Date Filed 9-12-83

By G. LANGLITZ DEPUTY

File No. 341-83 R

UNION COUNTY
SURVEYOR

Date Received 9-12-83

Date Filed 9-12-83

By G. LANGLITZ DEPUTY

File No. 342-83 R

Remonumentation of Certain Original Corner Points,
T. 4 S., R. 41 E., Willamette Meridian, Oregon

CHAINS

A root hole, bears S. 45° E., 44 lks. dist., with a down and decayed fir alongside, size indeterminate, with scribe marks S34 visible on opened blaze.

A root hole, bears S. 1° W., 22 lks. dist.

A root hole, bears N. 70° W., 4 lks. dist.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

T 4 S R 41 E
S 28 | S 27
S 33 | S 34
1971

OK

from which new bearing trees

A western larch, 14 ins. diam., bears N. 54¼° E., 58 lks. dist., mkd. T4S R41E S27 BT.

A spruce, 16 ins. diam., bears S. 27½° E., 94 lks. dist., mkd. T4S R41E S34 BT.

A spruce, 10 ins. diam., bears S. 25° W., 48 lks. dist., mkd. T4S R41E S33 BT.

A white fir, 10 ins. diam., bears N. 58° W., 73 lks. dist., mkd. T4S R41E S28 BT.

The ¼ sec. cor. of secs. 27 and 34, monumented with the original basalt stone, 12 x 8 x 8 ins., loosely set, 2 ins. in the ground, marked ¼ on N. face, from which the only remaining original bearing tree:

A sawed western larch stump, 28 ins. diam., bears S. 20° W., 37 lks. dist., with a down larch alongside, with scribe marks ¼ S BT visible on open double blaze.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 4 S R 41 E
¼ S 27
¼ S 34
1971

from which new bearing trees

A fir, 8 ins. diam., bears N. 65° W., 53 lks. dist., mkd. ¼ S27 BT.

A lodgepole pine, 12 ins. diam., bears S. 11¼° E., 110 lks. dist., mkd. ¼ S34 BT.

Deposit corner stone and set 5 ft. steel fence post alongside iron post.

Need signs on post

DLD
8-7-83
Both Live OK
staked 54-4 5/8
Painted

UNION COUNTY
SURVEYOR

Date Received 9-12-83

Date Filed 9-12-83

By G. LANGLITZ DEPUTY

File No. 343-83 R

CERTIFIED RECORD OF LAND CORNER MONUMENT POSITION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Henry M. Thatcher under GLO contract number 320, dated April 1, 1879. Surveyor General record states:

- A fir 22 in. in dia. marked for Cor to Secs. 27, 28, 33 and 34, from which:
- A Fir 20 in. in dia. bears N70°W, 4 lks. dist.
- A Fir 40 in. in dia. bears N50°E 28 lks. dist.
- A Fir 15 in. in dia. bears S45°E 44 lks. dist.
- A Fir 18 in. in dia. bears S1°W 22 lks. dist.

Corner reestablished from original accessories by Stephen Albright, BLM Cadastral Surveyor under special instructions dated May 3, 1957 included under Group Number 350. BLM Field Notes state:

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd. as shown below, from which new bearing trees:

- A western larch, 14 ins. diam., bears N. 54 3/4° E., 58 lks. dist., mkd. T4S R41E S27 BT.
- A spruce, 16 ins. diam., bears S 27 1/2° E., 94 lks. dist., mkd T4S R41E S34 BT.
- A spruce, 10 ins. diam., bears S 25° W., 48 lks. dist., mkd. T4S R41E S33 BT.
- A white fir, 10 ins. diam., bears N 58° W., 73 lks. dist., mkd T4S R41E S29 BT.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found 2 1/2" iron pipe with 3" brass cap, marked as shown below, 12 inches above ground, from which:

- A 17 inch Western Larch bears North 56° East, a distance of 38.30 feet, alive and vigorous with healed blaze.
- A spruce snag bears South 27° East, a distance of 62 feet, dead and downed with healed blaze.
- A 23 inch Spruce bears South 25° West, a distance of 31.50 feet alive and vigorous with healed blaze.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


From the corner monument position,

NEW BEARING TREES

- A 15 inch White Fir bears South 27° East, a distance of 13.10 feet, marked T4S R41E S34 BT.
- A 13 inch White Fir bears North 15° West, a distance of 8.40 feet, marked T4S R41E S28 BT.

I hereby certify that the corner was perpetuated on September 22, 2012.


T 4 S R 41 E V-13

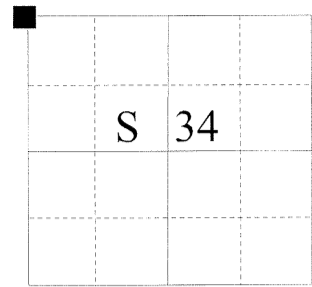

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

OREGON
June 2, 2010
JEFFERY S. HSU
83571

Renewal Date: June 30, 2013

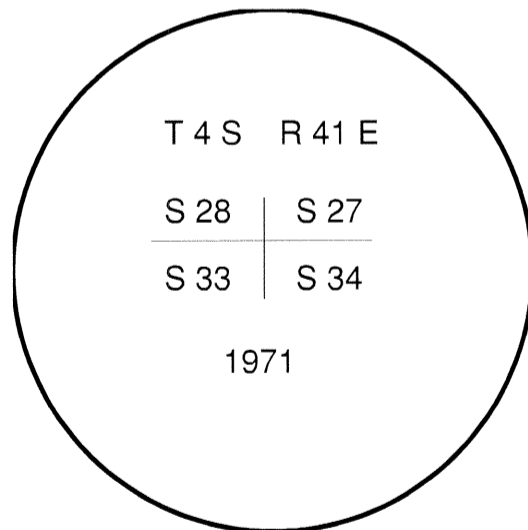

**UNION COUNTY
SURVEYOR**

Date Received 9/28/12

Date Filed 9/28/12

Filed By R. ROBINSON, DEPUTY

File Number 042-2012R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 16° East declination, the distances are to a 60d spike driven into the root crown at the right side of the bearing trees. I place a brass washer marked OPLS 83571 in the lower blaze of the new accessories.