


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1, 1879. Surveyor General record states:

Set stone 15x13x5 for 1/4 sec cor from which;

A black pine 9 in dia bears N15°W 9 lks dist
A black pine 10 in dia bears S8°W 30 lks dist

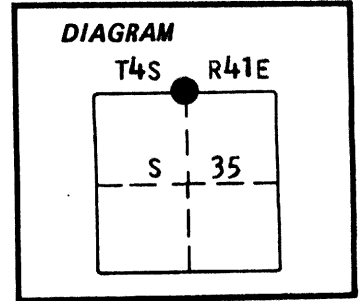

No record of subsequent monumentation found in county records

Description of corner evidence found:

Found a stone 14x11x4 inches marked 1/4 S in small mound of stone

Found remains of Lodgepole Pine S8°W 30 lks dead down and rotting with scribes visible
Found remains of Lodgepole Pine N15°W 9 lks rotted, found slab of wood with BT scribe visible


Description of monument and accessories I established to perpetuate the original location of this corner: In place of stone, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown 28 inches in the ground from which:

New BTs

A 13 inch diameter Tamarack bears N57°E 17.58 feet marked 1/4 S26 BT
A 16 inch diameter Tamarack bears S48°E 13.70 feet marked 1/4 S35 BT

Buried the original stone South and alongside of monument
Set steel fencepost approximately 5 feet North with 54-9 sign attached

Corner monumented June 19, 1986
Witnesses: Greg Blackman and Rick Robinson

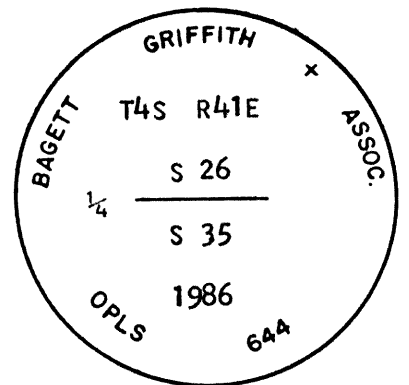

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of..... 19.....

(COUNTY OFFICIAL)

UNION COUNTY SURVEYOR

(DEPUTY)

Form R6-7100-57 (9/71)

Date Received 7-28-86

Date Filed 8-19-86

By G. LANGLITZ DEPUTY

File No. 117-86 R

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276