

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by GLO Contract number 235 by John H. Stone dated July 6, 1875. GLO Record states:

Set stone 16x12x7 as per instructions for 1/4 sec cor

Survey number 29-88 places the corner position by proportion, but did not set a monument.

No record of subsequent monumentation found in UNION COUNTY survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found no evidence of the original GLO Corner monument. See Survey Number 031-2000.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


At the position determined by survey number 031-2000, I set a 2 1/4"x30" aluminum pipe with aluminum cap marked as shown below, 30" in the ground, from which:

NEW BEARING OBJECTS:

- A 5/8"x30" iron pin with 1 1/4" aluminum cap marked NE RP bears North 37° East, a distance of 6.75 feet.
- A 5/8"x30" iron pin with 1 1/4" aluminum cap marked SE RP bears South 19° East, a distance of 50.20 feet. (Pin falls in existing East-West fence line)
- A 5/8"x30" iron pin with 1 1/4" aluminum cap marked SW RP bears South 43° West, a distance of 51.70 feet. (Pin falls in existing East-West fence line)
- A 5/8"x30" iron pin with 1 1/4" aluminum cap marked NW RP bears North 47° West, a distance of 9.76 feet.

Set a steel fence post approximately 2 feet North of the monument.

I hereby certify that the corner was perpetuated on October 3, 2000.
Witnesses: Norbert Volny and Greg Blackman Jr.

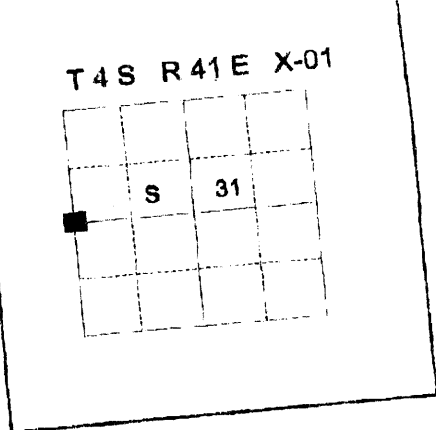


REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson

OREGON
July 17, 1988
RICK G. ROBINSON
2219

Renewal Date December 31, 2000

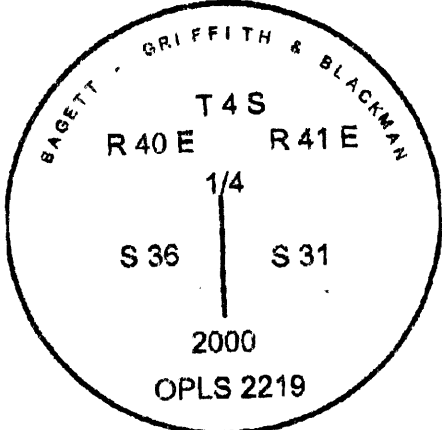

**UNION COUNTY
SURVEYOR**

Date Received 10/10/2000

Date Filed 10/31/00

Filed By *Greg Blackman*

File Number 029-2000R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 17° East magnetic declination and the distances are to the center of the aluminum cap.