


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

J-10

History of original corner establishment:

No previous history

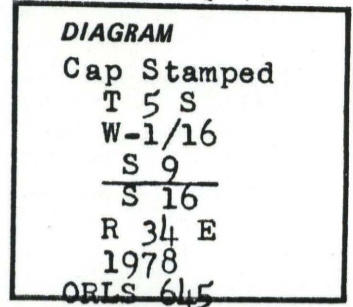

Description of corner evidence found:

None

Description of monument and accessories I established to perpetuate the original location of this corner:

I set a 2 1/2" brass cap on a 30" galv. iron pipe and being stamped as shown above, in a large mound of stone and dirt which buried the monument.

New bearing trees:

A pine 6" dia. bears N 35 30 W, 23.33 feet and scribed 1/16 S S 9 BT.
A pine 7" dia. bears N 50 E, 18.25 feet and scribed 1/16 S S 16 BT.

Note: There were no trees available in Section 16 that could be used as a bearing tree, therefore used the second tree also being in Section 9.

REGISTERED PROFESSIONAL LAND SURVEYOR

James H. Hambleton
8-21-78

OREGON JULY 10, 1964 JAMES H. HAMBLETON 645
--

I hereby certify the above corner monument was re-established as herein described in August 1978.

Witnesses: *Leonard C. Green*
Crew Chief

L. D. Shiley
Instrument Man

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL)

.....
(DEPUTY)

Form R6-7100-57 (9/71)

UNION COUNTY SURVEYOR
Date Received _____
☆ GPO-798-276
Date Filed _____
By _____
File No. <u>561-84R</u>


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

J - 10

West 1/16, Sec. 9 and 16, T. 5 S., R. 34 E., W.M.

History of original corner establishment:

The West 1/16, Sec. 9 and 16, T. 5 S., R. 34 E., W.M. was originally monumented by James H. Hambleton (JHH) L.S. #645, in August, 1978. JHH's record states: "I set a 2 1/2" brass cap on a 30" galv. iron pipe, and being stamped as shown above, in a large mound of stone and dirt which buried the monument."

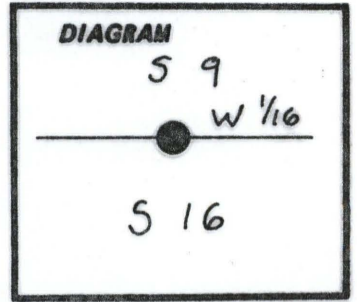

Description of corner evidence found:

I found a 2 1/2" diam. brass cap on a 2 1/2" galvanized iron pipe, 2" below the surface of the ground, marked

T5S
W-1/16
S 9
S16

R34E
RLS 645 1978

From which: JHH BT's:

A stump, of a Lodgepole Pine, 7" (7") diam., bears N53°E (N50°E), a distance of 18.4 ft. (18.25 ft.).

Pieces of a Lodgepole Pine log, loose, 6" (6") diam., bears N36°W (N35 1/2°W), a distance of 23 ft. (23.33 ft.), scribed "/16S9 BT" visible, and brass washer marked "LS 645" nailed below the "BT".

Description of monument and accessories established to perpetuate the original location of this corner:

From the existing brass cap I established the following new BT's: A Lodgepole Pine, 6" diam., bears N61°E, a distance of 5.3 ft., scribed "XBT", with a brass washer marked "LS 2211" nailed between the B & T.

A Lodgepole Pine, 8" diam., bears N25°W, a distance of 28.2 ft., scribed "W 1/16 S9 BT", with a brass washer marked "LS 2211" nailed between the B & T.

The brass cap is in a stone collar, which we re-build.

Set or reset steel fence posts: North 5 ft., and East 2.6 ft.

A cabin and 2 out buildings bear S40°W, about 300 ft.

REGISTERED PROFESSIONAL LAND SURVEYOR

Roger Green

OREGON JULY 17, 1986 ROGER O. GREEN 2211

Crew: Roger O. Green, Earl E. Strang
Equipment: Kesson tape & staff compass.
Field work: 9/17/91

Roger Green, L.S. 2211
Wallowa-Whitman National Forest
3502 Highway 30
La Grande, OR 97850
(503)963-7186

Note: Parenthetical information is Hambleton's record.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)

UNION COUNTY SURVEYOR
Date Received 12/9/91
Date Filed 12/12/91
By Greg Blanton
File No. 041-1991R