


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

L-20

No previous history

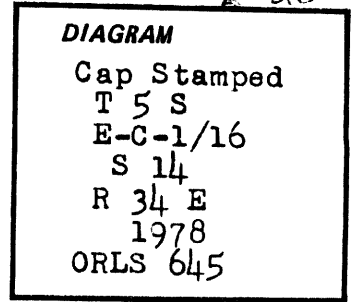

Description of corner evidence found:

None

Description of monument and accessories I established to perpetuate the original location of this corner:

I set a 2 $\frac{1}{2}$ " brass cap in a 30" galv. iron pipe, and stamped as shown above, in the ground, and placed a large mound of stone around the monument.

New bearing trees:

A pine 6" dia. bears N 26 W, 32.83 feet scribed 1/16S S 14 BT.
A pine 6" dia. bears S 13 W, 44.30 feet scribed 1/16S S 14 BT.

REGISTERED PROFESSIONAL LAND SURVEYOR

James H. Hambleton
8-21-78

OREGON JULY 1, 1906 JAMES H. HAMBLETON 645

I hereby certify the above corner monument was re-established as herein described in August 1978.

Witnesses: *Leonard E. Green*
Crew Chief

L. D. Shilby
Instrument Man

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR
Date Received _____
☆ GPO—798-276
Date Filed _____
By _____
File No. 580-84R