


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

M-17

History of original corner establishment:

No previous history

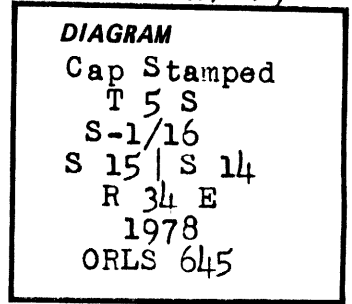

Description of corner evidence found:

None

Description of monument and accessories | established to perpetuate the original location of this corner:

I set a 2 1/8" brass cap in a 30" galv. iron pipe, and stamped as shown above, in the ground, and placed a large mound of stone around the monument.

New bearing trees:

- A pine 7" dia. bears S 65 W, 50.77 feet scribed 1/16S S 15 BT.
- A pine 5" dia. bears S 51 E, 46.21 feet scribed 1/16S S 14 BT.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

James H. Hambleton
8-21-78

OREGON
JULY 19, 1904
JAMES H. HAMBLETON
645

I hereby certify the above corner monument was re-established as herein described in August 1978.

Witnesses:

L. E. Green
Crew Chief

L. D. Shuler
Instrument Man

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

by

(DEPUTY)

CLATSOP COUNTY SURVEYOR	
Received	_____
File No.	584-84R