


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. O-22

History of original corner establishment:

None

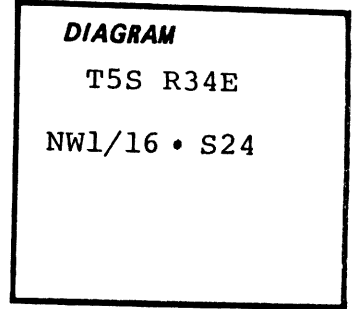

Description of corner evidence found:

No monument or evidence found.

Description of monument and accessories established to perpetuate the original location of this corner:

Set 2.5" aluminum cap on 2 3/8"x30" aluminum pipe rising 8" above ground. Cap is stamped:  
Set steel fence post 4.0 ft. east of corner.

T5S R34E  
NW1/16•S24

RLS 1844  
1984

New BT's:

- A 6" L. Pine bears S3°W, 15.0 ft., blazed and scribed: NW 1/16 S24 BT.
- A 5" L. Pine bears N44°W, 14.4 ft., blazed and scribed: NW 1/16 S24 BT.


Brass LS 1844 disc in lower end of blaze. Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982.

Compass Declination: 19 3/4°E

Witness: Duane Scott

Corner is found in dense lodgepole 1350 ft. south of Fly Creek, 300 ft. east of Road 5160-196.

I hereby certify the above described corner monument and/or accessories was established as described on June 22, 1984.

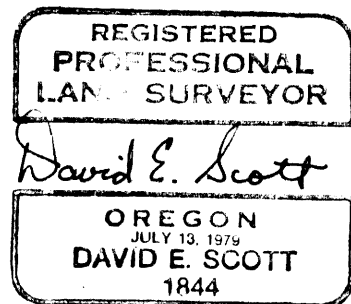

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

<b>UNION COUNTY SURVEYOR</b>
Date Received <u>10-17-84</u>
Date Filed <u>10-24-84</u>
By <u>G. LANGLITZ, Deputy</u>
File No. <u>952-84 R</u>