


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The original subdivision of T5S, R34E was by Rufus S. Moore under Contract No. 451, approved Feb. 1, 1884. He set a stone 14x12x9, but no bearing trees.

Index File No. P-21

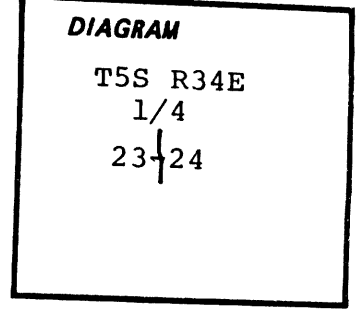

Description of corner evidence found:

Found stone 14x13x10 in mound, marked 1/4 very faintly. No bearing trees or other accessories found.

Description of monument and accessories established to perpetuate the original location of this corner:

Set 2.5" aluminum cap on 2 3/8"x30" aluminum pipe rising 20" above ground in mound of rock and dirt. Set steel fence post 2.0 ft. north of corner. Corner set from evidence.

Cap stamped:

T5S R34E
1/4
S23 S24
RLS 1844
1984

New BT's:

A 10" P. Pine bears S73°W, 124.1 ft., blazed and scribed: 1/4 S23 BT.

A 6" P. Pine bears N18°E, 101.9 ft., blazed and scribed: 1/4 S24 BT.

Brass LS 1844 disc in lower end of blaze. Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982.

Compass Declination: 19 3/4°E

Witness: Duane Scott

Corner is found on west slope 300 ft. west of Road 5160-196.

I hereby certify the above described corner monument and/or accessories was established as described on June 21, 1984.

REGISTERED PROFESSIONAL LAND SURVEYOR

David E. Scott

OREGON JULY 13, 1879 DAVID E. SCOTT 1844

Office of..... County of.....
State of..... I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)

UNION COUNTY SURVEYOR
Date Received <u>10-17-84</u>
Date Filed <u>10-24-84</u>
By <u>G. LANGLITZ DEPUTY</u>
File No. <u>955-84 R</u>