


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. R-15

History of original corner establishment:

The original subdivision of T5S, R34E was by Rufus S. Moore under Contract No. 451, approved Feb. 1, 1884. Set a stone 12x10x6, from which a 36" Pine bears N9°E, 93 lks. and a 15" Pine bears S62°E, 52 lks.

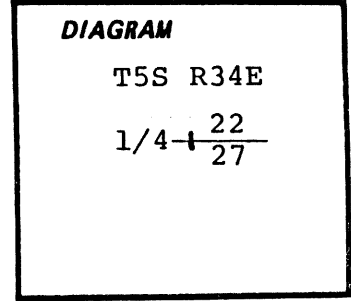

Description of corner evidence found:

Found stone 12x12x10 marked 1/1.

Bearing trees found:

Rotted remains of 24" Pine scribed (1/4S BT), bearing S62°E, 34.3 Ft.
A 30" Pine stump 12" high, no marks, bears N9°E, 62.0 ft.

Description of monument and accessories established to perpetuate the original location of this corner:

Set 2.5" aluminum cap on 2 3/8"x30" aluminum pipe rising 14" in dirt and rock mound. Cap stamped:

Set steel fence post 3.0 ft. north of corner.

T5S R34E
1/4 $\frac{S22}{S27}$
RLS 1844
1984

New BT's:

An 11" Fir bears N31.5°E, 36.7 ft., scribed: 1/4 S22 BT.
An 11" P. Pine bears S17.5°W, 100.7 ft., scribed: 1/4 S27 BT.

Brass LS 1844 disc in lower end of blazes. Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982.

Compass Declination; 19 3/4°E

Witness: Duane Scott

Corner is found 90 ft. north of Road 5160-225, 1400 ft. from Road 5160-190.

I hereby certify the above described corner monument and/or accessories was established as described in July of 1984.



Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL)

(DEPUTY)

UNION COUNTY SURVEYOR
Date Received <u>10-17-84</u>
Date Filed <u>10-24-84</u>
By <u>G. LANGLITZ, Deputy</u>
File No. <u>959-84 R</u>