


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. U-19

History of original corner establishment:

None

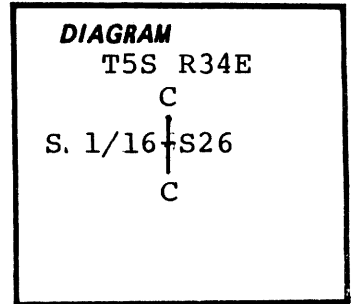

Description of corner evidence found:

No corner monument or other official accessories found.

Description of monument and accessories established to perpetuate the original location of this corner:

Set 2.5" aluminum cap on 2 3/8" aluminum pipe rising 8" above ground. Set steel fence post 3.0 ft. west of corner.

Cap is stamped;

T5S R34E
 C
 S 1/16 | S26
 C
 RLS 1844
 1984

New BT's:

A 5" L. Pine bears N25°E, 30.7 ft., blazed and scribed: CS 1/16 S26 BT.

An 8" Tamarack bears S77 1/4°E, 36.2 ft., blazed and scribed: CS 1/16 S26 BT.


Brass LS 1844 disc in lower end of blazes. Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982.

Compass Declination: 19 3/4°E

Witness: Duane Scott

Corner is found 35 ft. north of fence, 80 ft. east of road. From 5160-090 south to Lookout Creek and cabins.

I hereby certify the above described corner monument and/or accessories was established as described on June 25, 1984.

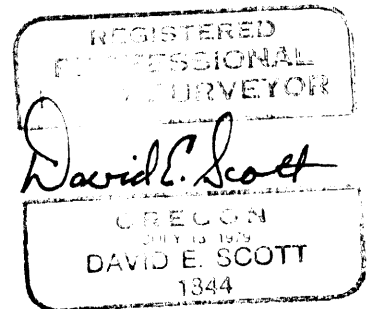

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
 (COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received 10-17-84

Date Filed 10-24-84
GPO-798-276

By G. LANGLITZ, DEPUTY

File No. 970-84R