


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. V-18

History of original corner establishment:

None.  
None

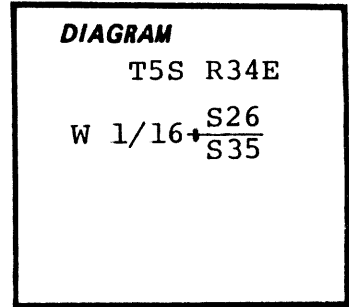

Description of corner evidence found:

No corner monument or other official accessories found.

Description of monument and accessories established to perpetuate the original location of this corner:

Set 2.5" aluminum cap on 2 3/8"x30" aluminum pipe rising 7" above ground. Set steel fence post 3.0 ft. north of corner.

Cap is Stamped:

T5S R34E

W 1/16 +  $\frac{S26}{S35}$

New BT's:

RLS 1844

1984

An 8" Tamarack bears N1.5°E, 14.2 ft., blazed and scribed: W 1/16 S26 BT.

An 8" Spruce bears S80 1/4°W, 18.6 ft., blazed and scribed: W 1/16 S35 BT.


Brass LS 1844 disc in lower end of blazes. Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982.

Compass Declination; 19 3/4°E

Witness: Duane Scott

Corner is found 200 ft. north of Lookout Creek. Take Road 5160-070 to Lookout Creek and 1/4  $\frac{26}{35}$ . Go west along creek to posted line, north to corner.

I hereby certify the above described corner monument and/or accessories was established as described on June 25, 1984.

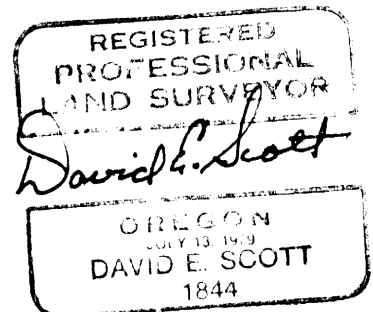

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by .....

(COUNTY OFFICIAL)

(DEPUTY)

**UNION COUNTY SURVEYOR**

Date Received 10-17-84

Date Filed 10-24-84  
GPO-798-275

By G. LANGLITZ, DEPUTY

File No. 972-84 R