


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. V-19

History of original corner establishment:

The original subdivision of T5S, R34E was by Rufus S. Moore under Contract No. 451, approved Feb. 1, 1884. He set a post, from which an 18" Pine bears N38°W, 37 lks. and an 8" Pine bears S81°30' W, 214 lks.

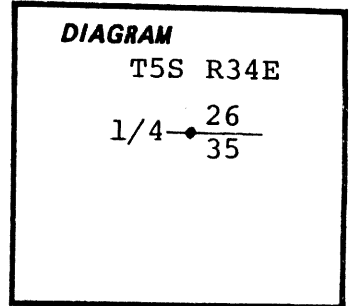

Description of corner evidence found:

No corner monument or other official accessories found.

Description of monument and accessories established to perpetuate the original location of this corner: Corner set by proportion.

Set 2.5" aluminum cap on 2 3/8"x30" aluminum pipe rising 4" above ground. Set two steel fence posts 5.0 ft. east and 5.5 ft north of corner.

Cap is stamped:

T5S R34E
1/4 S26/S35
RLS 1844
1984

New BT's:

An 8" L. Pine bears N57.5°E, 40.0 ft., blazed and scribed: 1/4 S26 BT.

An 8" L. Pine bears S86.5°W, 111.2 ft., blazed and scribed: 1/4 S35 BT.


Brass LS 1844 disc in lower end of blazes. Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982.

Compass Declination: 19 3/4°E

Witness; Duane Scott

Corner is found 30 ft. south of fly creek, 96 ft. west of cabin.

I hereby certify the above described corner monument and/or accessories was established as described on June 25, 1984.

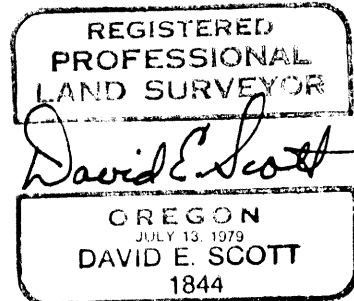

Office of..... County of.....
State of..... I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received 10-17-84
Date Filed 10-24-84
By G. LANGLITZ, DEPUTY
File No. 973-84 R