


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. W-23

History of original corner establishment:

None.

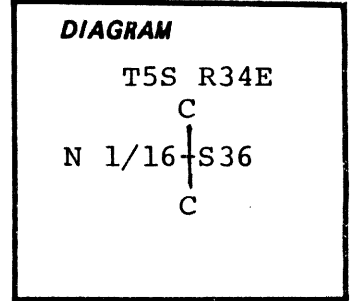

Description of corner evidence found:

No evidence of corner monument or bearing trees.

Description of monument and accessories established to perpetuate the original location of this corner:

Set 2.5" aluminum cap on 2 3/8"x30" aluminum pipe rising 6" above ground. Cap is stamped:

Set steel fence post 3.0 ft. east of corner

New BT's:

- A 6" Tamarack bears S62°W, 47.7 ft., blazed & scribed; CN 1/16 S36 BT.
- A 6" Tamarack bears S9°E, 35.9 ft., blazes & scribed; CN 1/16 S36 BT.


Brass LS 1844 disc in lower end of blazes. Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982.

Compass Declination: 19 3/4°E

Witness: Duane Scott

Corner is found in dense lodgepole, 1300 ft. east of road 5166. 1000 ft. south of road through private strip.

I hereby certify the above described corner monument and/or accessories was established as described on August 25, 1984.

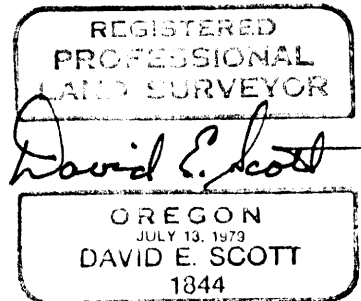

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)

**UNION COUNTY SURVEYOR**

---

Date Received 10-17-84

Date Filed 10-24-84

By G. LANGLITZ, DEPUTY

File No. 980-84 R