


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None.

Index File No. X-23

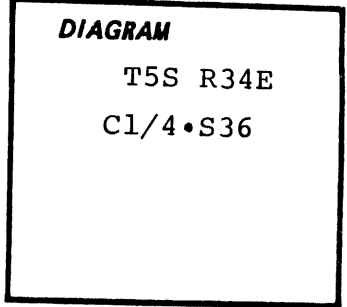

Description of corner evidence found:

No corner monument or other official accessories found.

Description of monument and accessories established to perpetuate the original location of this corner:

Cap is stamped:

Set 2.5" aluminum cap on 2 3/8"x30" aluminum pipe rising 5" above ground. Set steel fence post 3.0 ft. north of corner.

T5S R34E
C 1/4 • S 36
RLS 1844
1984

New BT's:

A 9" Tamarack bears N40°E, 14.8 ft., blazed and scribed: C 1/4 S36 BT.

A 6" Tamarack bears N83°E, 9.5 ft., blazed and scribed: C 1/4 S36 BT.


Brass LS 1844 disc in lower end of blaze. Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982.

Compass Declination: 19 3/4°E

Witness: Duane Scott

Corner is found

I hereby certify the above described corner monument and/or accessories was established as described on August 25, 1984.

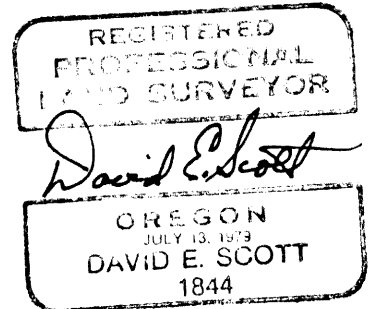

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)

Form R6-7100-57 (9/71)

UNION COUNTY SURVEYOR
Date Received <u>10-17-84</u>
Date Filed <u>10-24-84</u> <small>☆ GPO-798-276</small>
By <u>G. LANGLITZ, DEPUTY</u>
File No. <u>984-84 R</u>