


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner established by Jacob C. Cooper under General Land Office contract no. 397, dated July 1, 1881. Surveyor General Records states: Set post 3 1/2 feet long 3 inches square 18 inches in the ground on West side of ridge 90 feet below summit in open pine timber undergrowth the same for 1/4 section corner marked 1/4 S on North and South faces.
From which:

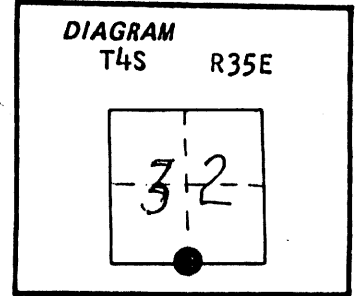

A Tamarack 30 inches diameter bears N89°E 40 lks. distant, marked 1/4 SBT

A Fir 18 inches in diameter bears S71°W, 49 lks. distant, marked 1/4 SBT.

No record of subsequent remonumentation was found in County Records.
Description of corner evidence found:

Found Northeast BT, a 32" Tamarack. I opened and found scribing.
No evidence of corner or other BT.

UNION COUNTY SURVEYOR

Date Received 12-5-85
Date Filed 12-6-85
By G. LANGRISH, DEPUTY
File No. 176-85 R

See map of survey dated November 1985.
Description of monument and accessories I established to perpetuate the original location of this corner:


At record bearing and distance from the found BT, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown below, 30 inches in the ground, with mound of stone surrounding cap, from which:

A 12" Ponderosa Pine bears S27°W, 51.24 feet marked 1/4 S 5 BT

A 13" Douglas Fir bears N53°W, 10.20 feet marked 1/4 S 32 BT

Set steel fence post approximately 5 feet west with 54-4 sign attached.

Corner set 10/21/85
Witness: Stratton French

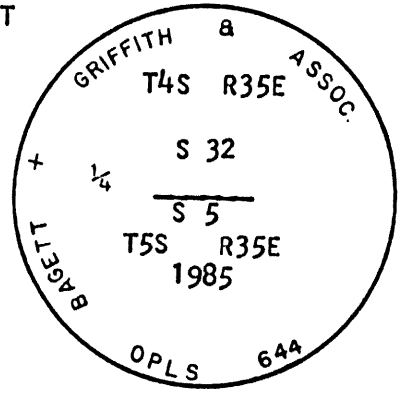

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer nailed to BT blaze.
Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)