


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This is not an original G.L.O. corner.

Index File No. 0-08

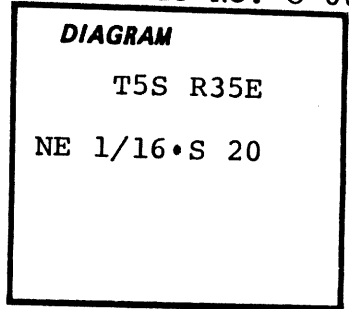

Description of corner evidence found:

No corner evidence found.

Description of monument and accessories | established to perpetuate the original location of this corner:

Cap is stamped:

Corner set by subdivision of section.
Set 2.5" aluminum cap on x"x30" aluminum pipe rising 6" above ground. Set steel fence post 3.0 ft. south of corner.

T5S R35E
NE 1/16•S 20
RLS 1844
1984

New BT's:

A 9" Fir bears N17.5°W, 34.4 ft., blazed and scribed: NE 1/16 S20 BT.
A 7" Fir bears N88°E, 39.3 ft., blazed and scribed: NE 1/16 S20 BT.


Attached brass disk stamped LS 1844 to base of blazes. Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982.

Corner is found 45.0 ft. south of east-west fence, 850 ft. east of Fly Creek. Road 5115 to fence line, walk 1050 ft. east to corner.

Compass Declination: 19 1/2°E

Witness: Jeff Sheets

I hereby certify the above described corner monument and/or accessories was established as described on November 6, 1984.

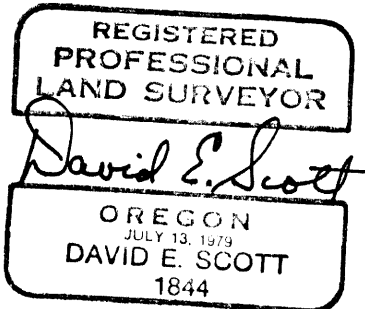

Office of..... County of.....
State of..... I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)

FOR COUNTY SURVEYOR
Received 1-23-85
★ GPO-798-276
Filed 2-5-85
By G. LANGRISH, DEPUTY
File No. 4-85R