


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. R-15

History of original corner establishment:

In 1882, under Contract No. 481, Rufus S. Moore set a stone 30x16x4, from which an 18" Pine bears S32°W, 3 lks. and an 18" Fir bears N32°E, 28 lks.

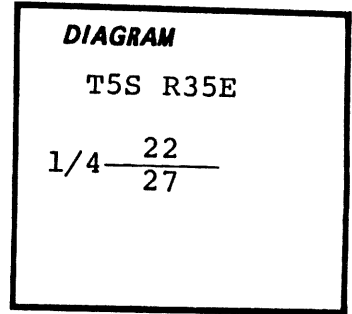

Description of corner evidence found:

Found stone 25x14x3 marked 1/4 on north side.

Bearing trees found:

- A 20" P. Pine snag bears S32°W, 2.6 ft., scribed: 1/4 S.
- A 30" Fir stump bears N32°E, 18.5 ft., scribed: BT

Description of monument and accessories established to perpetuate the original location of this corner:

Set 2 1/2" aluminum cap on 2"x30" aluminum pipe rising 6" above ground. Cap is stamped:

T5S R35E

Set steel fence post 3.0 ft. north of corner.

1/4 $\frac{S 22}{S 27}$

New BT's:

8" Tamarack bears N54°W, 25.3 ft., blazed and scribed: 1/4 S22 BT.

RLS 1844
1984

8" Fir bears S54°W, 19.5 ft., blazed and scribed: 1/4 S27 BT.


Attached brass disk stamped LS 1844 to base of each blaze. Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982.

Corner is found on slight south slope 300 ft. south of Road 5155-020, on top of ridge which runs north and south.

Compass Declination: 19 1/2°E

Witness: Jeff Sheets

I hereby certify the above described corner monument and/or accessories was established as described on November 20, 1984.

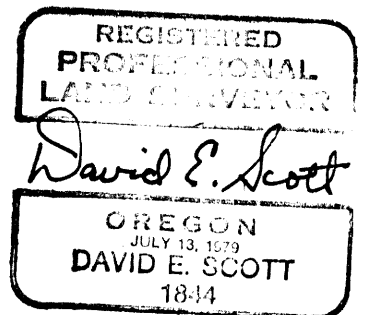

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)

UNION COUNTY SURVEYOR
Date Received 1-23-85
Date Filed 2-5-85
By G. LANGUITZ, DEPUTY