


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. V-07

History of original corner establishment:

In 1882, under Contract No. 481, Rufus S. Moore set a stone 12x12x7, from which a 32" Pine bears N17°E, 82 lks., and a 34" Pine bears S43°E, 82 lks.



Description of corner evidence found:

Found original stone 12x12x7, marked 1/4 on north side.

Bearing trees found:

34" Pine snag 12 feet tall bears S43°E, 54.1 ft., blazed face burnt over.
32" Pine snag bears N17°E, 54.1 ft., scribed 1/4 S BT.

Description of monument and accessories established to perpetuate the original location of this corner:

Cap is stamped;

Set 2.5" aluminum cap on 2"x30" aluminum pipe rising 24" above ground in mound of rock and dirt. Set steel fence post 3.0 ft. north of corner.

T5S R35E
1 S 29
4 S 32
RLS 1844
1984

New BT's:

8" P. Pine bears N47 1/2°W, 65.9 ft., blazed and scribed: 1/4 S29 BT.
6" P. Pine bears S30°W, 21.6 ft., blazed and scribed; 1/4 S32 BT.


Attached brass disk stamped LS 1844 to base of each blaze. Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982.

Corner is found on south slope in open timber 50 ft. south of road through Vey Ranch.

Compass Declination: 19 1/2°E

Witness: Jeff Sheets

I hereby certify the above described corner monument and/or accessories was established as described on November 9, 1984.

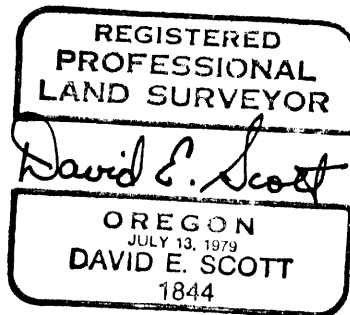

Office of..... County of.....

State of..... I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR
Date Received 1-23-85
★ GPO-798-276
Date Filed 2-5-85
By G. LANGRITZ, DEPUTY
File No. 20-85 R