

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


Index File No. X-17

History of original corner establishment:

A post 3'x3"x3", 24" in ground: from which:

- a 15" pine bears S8°E, 115 lks.
- a 15" pine bears S36°W, 202 lks.

Original corner established in 1882 by Rufus S. Moore under contract #451

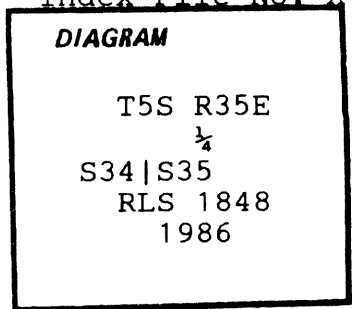

Description of corner evidence found:

None.

Description of monument and accessories established to perpetuate the original location of this corner: Cap is stamped:

Set 2½"x30" aluminum capped aluminum pipe rising 6". No stones available.
Set steel fencepost 3' south of corner.

T5S R35E
 $\frac{1}{4}$
 S34|S35
 RLS 1848
 1986


RM's

- a 5/8"x36" iron rod with a 1½" aluminum cap marked: bears N45°E, 10 ft.
- A 5/8"x36" iron rod with a 1½" aluminum cap marked: bears N45°W, 10 ft.



Painted blazes and attached signs as required in Specifications for Cadastral Surveys, USFS Region 6, March, 1982.

Compass Declination: 19½°E
Witness: J. Sutton
I hereby certify that the above described corner monument and/or accessories was perpetuated as hereon described on Aug 22, 1986.

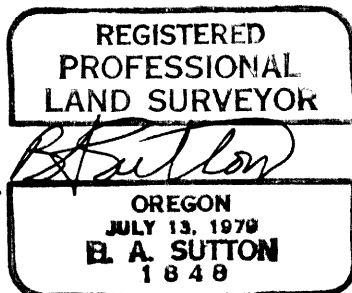

UNION COUNTY SURVEYOR

Date Received 8-26-86
 Date Filed 9-10-86
 By G. LANGRISH DEPUTY
 File No. 132-86 R

SEE SURVEY 27-86

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)