

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


Index File No. Z-19

History of original corner establishment:

A post 3 1/2"x3"x3", 18" in ground. from which:

- a 10" pine bears N72°E, 11 lks.
- a 12" W. Larch bears N43°W, 89 lks.

Original corner established in 1881 by Jacob C. Cooper under contract #397

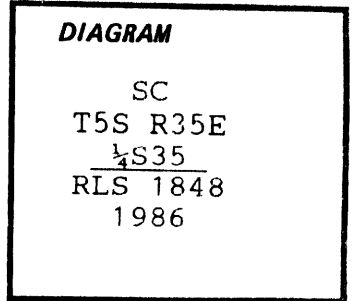

Description of corner evidence found:
None.

Description of monument and accessories I established to perpetuate the original location of this corner:

Cap is stamped:

Set 2 1/2"x30" aluminum capped aluminum pipe rising 6" in mound of stones.
Set steel fencepost 3' north of corner.

SC
T5S R35E
1/4 S35
RLS 1848
1986

New BT
A 22" L. Pine bears N34 1/2°W, 105.1 ft.
blazed & scribed SC 1/4 S35 BT
Set a 5/8" iron rod with a 1 1/2" aluminum cap which bears N45°E, 10 Ft., marked:



Painted blazes and attached signs as required in Specifications for Cadastral Surveys, USFS Region 6, March, 1982.

Compass Declination: 19 1/2°E

Witness: J. Sutton

I hereby certify that the above described corner monument and/or accessories was perpetuated as hereon described on Aug 21, 1986.



UNION COUNTY SURVEYOR

Date Received 8-26-86

Date Filed 9-10-86

By G. LANGLITZ, DEPUTY

File No. 139-86 R

See Survey 27-86

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)