

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. Z-21


History of original corner establishment:

A post 4 1/2"x4"x4" 2ft. in ground with mound of rocks around post 1 1/2 ft. high, 3 ft. at base.

from which:

A Quartz rock 16"x20"x10" bears S76°41'W.

A left-hand sharp peak on mount. bears N32°37'W, about 2 mi.

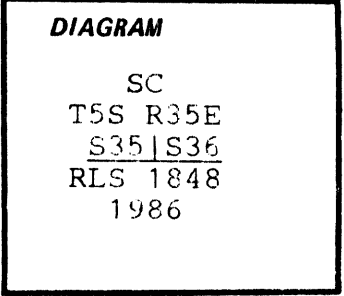

Original corner established in 1881 by Jacob C. Cooper under contract #397

Description of corner evidence found:

Remnants of decayed wood in mound of stones.

A Quartz rock bears S76 1/4°W, 101.7 ft. (no dist. in original notes.)

A left hand sharp peak bears N32 1/4°W, about 2 mi.

Description of monument and accessories established to perpetuate the original location of this corner:

Cap is stamped:

Set 2 1/2"x30" aluminum capped aluminum pipe rising 8" in mound of stones and dirt.
Set steel fencepost 3' north of corner.

SC
T5S R35E
S35|S36
RLS 1848
1986

New RP's:


- A 5/8"x36" iron rod with a 1 1/2" aluminum cap bears N45°W, 10 ft.
- A 5/8"x36" iron rod with a 1 1/2" aluminum cap bears N45°E, 10 ft.



Painted blazes and attached signs as required in Specifications for Cadastral Surveys, USFS Region 6, March, 1982.

Compass Declination: 19 1/2°E
Witness: J. Sutton

I hereby certify that the above described corner monument and/or accessories was perpetuated as hereon described on July 3, 1986.

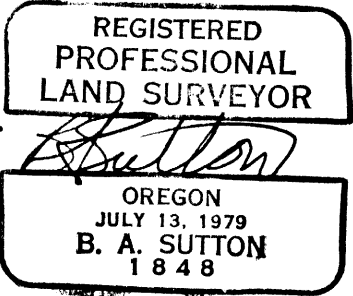

UNION COUNTY SURVEYOR

Date Received 8-26-86

Date Filed 9-10-86

By G. LANGLEY DEPUTY

File No. 140-86 R

Office of..... County of..... **SEE SURVEY 27-86**

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)