


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. Z-23

History of original corner establishment:

A post 3 1/2"x3"x3" 18" in ground from which  
a 10" pine bears S78°W, 48 lks.  
a 6" pine bears N8°W, 42 lks.

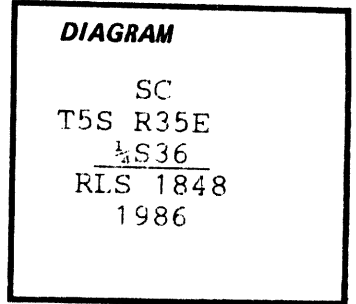

Original corner established in 1881 by  
Jacob C. Cooper under contract #397

Description of corner evidence found:

None. (corner falls in burn area.)

Description of monument and accessories established to perpetuate the  
original location of this corner:

Cap is stamped:

Set 2 1/2"x30" aluminum capped aluminum pipe  
rising 4". No stones available.  
Set steel fencepost 3' north of corner.

SC  
T5S R35E  
1/4S36  
RLS 1848  
1986

New BT's:

An 11" W. Larch bears N20 1/2°W, 44.8 ft.  
blazed & scribed 1/4 S36 SC BT  
A 12" W. Larch bears N75°E 30 ft.,  
blazed & scribed SC 1/4S36 BT

Painted blazes and attached signs  
as required in Specifications for  
Cadastral Surveys, USFS Region 6,  
March, 1982.

Compass Declination: 19 1/2°E

Witness: J. Sutton

I hereby certify that the above  
described corner monument and/or  
accessories was perpetuated as  
hereon described on July 16, 1986.



**UNION COUNTY  
SURVEYOR**

Date Received 8-26-86

Date Filed 9-10-86

By G. LANGRIZ, DEPUTY

File No. 141-86 R

SEE SURVEY 27-86

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)