


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None, corner established this survey.

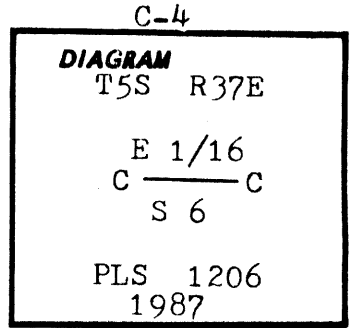

Description of corner evidence found:

None.

Description of monument and accessories established to perpetuate the original location of this corner:

At the corner point: set a 2½" x 30" aluminum pipe 26" into the ground, with a 24" dia. stone mound around it. 2½" aluminum cap marked as shown in the corner diagram.

From the corner point: (Bearing Trees)

- A 9" dia. Lodgepole Pine bears S 43° E at 48.8 ft. dist., mkd. CE 1/16 S 6 BT.
- A 9" dia. Lodgepole Pine bears N 61° E at 58.2 ft. dist., mkd. CE 1/16 S 6 BT.

Attached U.S.F.S. 54-9 and 54-3 signs to the bearing trees, and painted the face of the blaze and a 6" band around the bearing trees red. Attached a 3/4" dia. I:D. washer, mkd. PLS 1206, between the B and T scribes. Set a steel fence post 4' dist. with U.S.F.S. 54-9 and 54-2 signs attached. Used 18½° declination on a staff compass for readings to the bearing trees, and used a steel tape to measure to a nail set in the side of the trees at the base.

This corner was monumented to U.S.F.S. specifications on June 11, 1987, witnessed by Tom Fisk and Larry McBroom.

<b>UNION COUNTY SURVEYOR</b>
Date Received <u>5-1-89</u>
Date Filed <u>5-15-89</u>
By <u>G. LANGRISH DEPUTY</u>
File No. <u>53-89 R</u>

Office of..... County Surveyor..... County of..... Union.....  
State of..... Oregon....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....

..... by .....  
(COUNTY OFFICE) (DEPUTY)

Form R6-7100-57 (9/71)

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*James D. Hanley*  
**OREGON  
SEPTEMBER 24 1977  
JAMES D. HANLEY  
1206**