


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

D-6

History of original corner establishment:

None, corner established this survey.

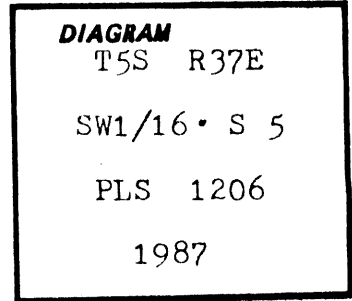

Description of corner evidence found:

None.

Description of monument and accessories established to perpetuate the original location of this corner:

At the corner point: set a 2½" x 30" aluminum pipe 25" into the ground, with a 36" dia. stone mound around it. 2½" aluminum cap marked as shown in the corner diagram.

From the corner point: (Bearing Trees)

- A 8" dia. Lodgepole Pine bears N 76° E at 17.0 ft. dist., mkd. SW1/16 S 5 BT.
- A 7" dia. Lodgepole Pine bears N 56° W at 82.0 ft. dist., mkd. SW1/16 S 5 BT.

Attached U.S.F.S. 54-9 and 54-3 signs to the bearing trees, and painted the face of the blaze and a 6" band around the bearing trees red. Attached a ¾" dia. I:D. washer, mkd. PLS 1206, between the B and T scribes. Set a steel fence post 4' dist. with U.S.F.S. 54-9 and 54-2 signs attached. Used 18½° declination on a staff compass for readings to the bearing trees, and used a steel tape to measure to a nail set in the side of the trees at the base.

This corner was monumented to U.S.F.S. specifications on June 19, 1987, witnessed by Tom Fisk, Larry McBroom and Tim Rouse.

UNION COUNTY SURVEYOR
Data Received <u>5-1-89</u>
Data Filed <u>5-15-89</u>
By <u>G. LANGLITZ, DEPUTY</u>
File No. <u>59-89R</u>

Office of... County Surveyor..... County of... Union
State of... Oregon....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Form R6-7100-57 (9/71)

☆ GPO-786-276

James D. Hanley

OREGON
SEPTEMBER 23 1977
JAMES D. HANLEY
1206