

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


T-13

History of original corner establishment:

William R. Gradon conducted the survey of Township 5 South, Range 37 East, W.M., under GLO contract 445 dated June 1, 1882.

Gradon set a post for the corner point, from which:

- A black pine 6" dia. bears S 65 E at 5 lks. dist.
- A black pine 4" dia. bears N 40 W at 6 lks. dist.

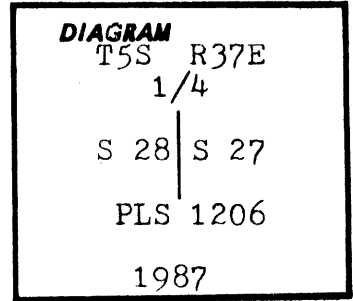

Description of corner evidence found:

None.

Description of monument and accessories established to perpetuate the

original location of this corner: After a thorough search of the area revealed no corner evidence;

At the proportioned point., set 2 1/2" x 30" aluminum pipe 24" into the ground, with a 36" dia. stone mound around it. 2 1/2" dia. aluminum cap mkd. as shown in the corner diagram.

From the corner point: (Bearing trees)

- A 8" dia. Lodgepole Pine bears S 72 W at 9.9 ft. dist. mkd. 1/4 S 28 BT
- A 6" dia. Lodgepole Pine bears N 7 E at 10.2 ft. dist. mkd. 1/4 S 27 BT

Attached U.S.F.S. 54-9 and 54-3 signs to the bearing trees, and painted the face of the blaze and a 6" band around the bearing trees red. Attached a 3/4" dia. brass I.D. washer, mkd. PLS 1206, between the B and T scribes. Set a steel fence post 4' South with U.S.F.S. 54-9 sign attached. Used 18 1/2° declination on a staff compass for readings to the bearing trees, and used a steel tape to measure to a nail set in the side of the trees at the base.

This corner was monumented to U.S.F.S. specifications on October 23, 1987, witnessed by Tom Fisk, Larry McBroom and Andy Marlette.

UNION COUNTY SURVEYOR

Date Received 5-1-89

Date Filed 5-15-89

By G. LANGRIZ, DEPUTY

File No. 83-89 R

Office of... County Surveyor County of... Union

State of... Oregon I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by

(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

James D. Hanley

OREGON
 SEPTEMBER 23, 1977
 JAMES D. HANLEY
 1206