


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

U-15

History of original corner establishment:

None, corner established this survey.

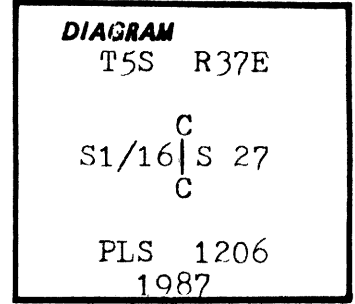

Description of corner evidence found:

None.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the corner point: set a 2½" x 30" aluminum pipe 28" into the ground, with a small stone mound. 2½" aluminum cap mkd. as shown in the corner diagram.

From the corner point: (New BT's)  
A 10" dia. Lodgepole Pine bears S 79° E at 27.9 ft. dist., mkd. CS 1/16 S 27 BT.  
A 12" dia. Lodgepole Pine bears S 5° W at 9.9 ft. dist., mkd. CS 1/16 S 27 BT.

Attached U.S.F.S. 54-9 and 54-3 signs to the bearing trees, and painted the face of the blaze and a 6" band around the bearing trees red. Attached a ¾" dia. brass I.D. washer, mkd. PLS 1206, between the B and T scribes. Set a steel fence post 4' West with U.S.F.S. 54-2 and 54-9 signs attached to it. Used 18½° declination on a staff compass for readings to the bearing trees, and used a steel tape to measure to a nail set in the side of the bearing trees at the base.

This corner was monumented to U.S.F.S. specifications on Oct. 27, 1987, witnessed by Tom Fisk, Larry McBroom and Andy Marlette.

Office of County Surveyor ..... County of Union  
State of Oregon ..... I hereby certify that the within instrument was filed in this office  
for record on the ..... day of ..... , 19.....

(COUNTY OFFICIAL)

(DEPUTY)

<b>UNION COUNTY SURVEYOR</b>	
Date Received	<u>5-1-89</u>
Date Filed	<u>5-15-89</u>
By	<u>G. LANGRIZ, DEPUTY</u>
File No.	<u>89-89 R</u>

Form R6-7100-57 (9/71)

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*James D. Hanley*  
OREGON  
SEPTEMBER 20, 1977  
JAMES D. HANLEY  
1206