




**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Original corner set by William B. Barr, under GLO Contract No. 388, approved December 31, 1881.  
 Record States: Marked basalt rock 12x12x6 for ¼ sec corner, from which:  
 Tamarack, 24 in diam., bears S 68° E, 51 lks dist.  
 Mahogany, 6 in diam., bears S 89° W, 62 lks dist.


**Subsequent Monumentation:**

Corner was remonumented by Duane I. Griffith, LS 644, as described by File No. 796-84R, in the records of the Union County Surveyor.  
 Record states:  
 Original BT  
 A mahogany 9 in. dia. Bears S89W, 40.9 feet, scribes visible.  
 At record bearing and distance from BT I set a 2½ inch x30 inch iron pipe with brass cap marked as shown (below) 26 inches in the ground from which:  
 New BTs  
 A 28 in. dia. pine bears S89E, 69.5 feet marked 1/4 S10 BT  
 A 22 in. dia. pine bears N12W, 77.3 feet marked 1/4 S9 BT  
 Raised small mound of stone.

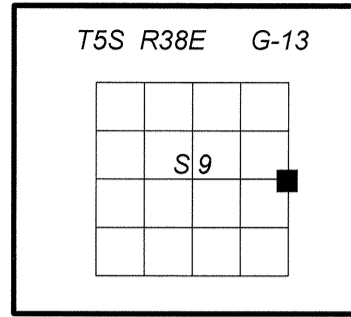

**Description of corner evidence found:**

Found 2½ ins. diam. iron pipe, projecting 6 ins. above ground, with rock collar, and 2½ ins. diam. brass cap, marked as shown:  
 From the recovered monument I find the original bearing tree remains:  
 A mahogany stump, 9 ins. diam., bears S. 89° W., 40.9 ft. dist., with remains alongside and faint scribe visible.  
 And accessories mkd. by Griffith:  
 A ponderosa pine, 32 ins. diam., bears S. 89° E., 69.5 ft. dist., alive and healthy, with healed blaze.  
 A ponderosa pine, 25 ins. diam., bears N. 12° W., 77.3 ft. dist., alive and healthy, with healed blaze.

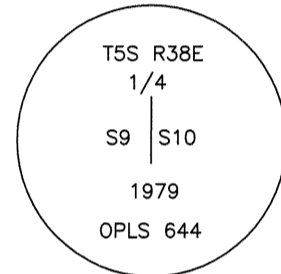

**Description of monument and accessories I established to perpetuate original location of this corner:**

New bearing trees:  
 A white fir, 6 ins. diam., bears N. 62° E., 64.9 ft. dist., mkd. 1/4 S10 BT.  
 A 5/8 ins. diam. by 30 ins. long rebar, projecting 14 ins. above ground, with mound of stone to top,  
 bears S. 39¾° W., 12.7 ft. dist., with 2½ ins. diam. alum cap mkd. SW RP.

Set guard posts ±5 ft. N'y and S'y with Property Boundary (54-2) and Land Survey Monument (54-9) signs attached.

New bearing tree marked on a single blaze and has a nail with a brass washer stamped "LS 2648" right side center for distance measurements.

Painted 6 ins. red bands and added Bearing Tree (54-3) and Land Survey Monument (54-9) signs as needed to all bearing trees.

Auto C/A geographic position:  
 Lat. 45°08'39.9" N  
 Long. 118°03'22.5" W

I hereby certify that the corner is monumented and accessories taken as described, using a Warren Knight staff compass, set with 15° East declination, and steel tape on June 25, 2014.

Witnesses: Kristina Powell, Brenda Johnson and Jon Howells

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

**Deceased**

OREGON  
JANUARY 18, 1994  
RON C. WALTER  
2648

Renewal Date: June 30, 2016

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*With: R. Wells*

OREGON  
July 22, 1977  
WILLIAM R. WELLS  
1106

Renewal Date: June 30, 2016

**UNION COUNTY  
SURVEYOR**

---

Date Received 2/25/15  
 Date Filed 2/25/15  
 By [Signature]  
 File No. 025-2015R

**NOTE:** See "Explanation for Successor Certifying Surveyor" statement in Narrative of Record of Survey, CS 010-2015, filed concurrently with this Land Corner Record.