

R623

Form 9600-9
(December 1979)
(formerly 9100-6)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

23

FIELD NOTES
OF THE

REMONUMENTATION OF CERTAIN ORIGINAL CORNER POINTS,

TOWNSHIP 5 SOUTH, RANGE 38 EAST,

[Empty lined area for field notes]

Of the WILLAMETTE Meridian,
in the State of OREGON

EXECUTED BY

Scott R. McIntyre, Cadastral Surveyor

Under special instructions dated July 13, 19 79, approved July 17, 1979

which provided for the surveys included under U.S. Survey/Group
Number 1000, and assignment instructions dated July 30, 19 82

Survey commenced August 20, 19 82

Survey completed August 31, 19 82

UNION COUNTY
SURVEYOR

Date Received 2-2-84

Date Filed 2-28-84

By G. LANGUITZ

File No. 809-84 R

Reponementation of Certain Original Corner Points,
T. 5 S., R. 38 E., Willamette Meridian, Oregon

CHAINS

from which new bearing trees

A larch, 17 ins. diam., bears N. 64° E., 17 lks.
dist., mkd. T58 R38E S12 BT.

A fir, 8 ins. diam., bears S. 22° E., 32 lks.
dist., mkd. T58 R38E S13 BT.

A fir, 8 ins. diam., bears S. 25° W., 21½ lks.
dist., mkd. T58 R38E S14 BT.

A fir, 8 ins. diam., bears N. 44° W., 27 lks.
dist., mkd. T58 R38E S11 BT.

Set a steel fence post alongside aluminum post.

The ¼ sec. cor. of secs. 14 and 23, monumented with the
original basalt stone, 12 x 12 x 5 ins., firmly set 8
ins. in the ground, no marks visible, from which the
remains of the original bearing trees:

A fir, 13 ins. diam., bears N. 62° E., 23 lks.
dist., with illegible scribe marks visible on
opened blade.

A decayed fir stump, 12 ins. diam., bears S. 65° E.,
30 lks. dist., with weathered blade, no marks
visible.

At the corner point

Set an aluminum post, 28 ins. long, 2½ ins. diam., 21
ins. in the ground, in a collar of stone, with aluminum
cap mkd.

T 5 S R 38 E

¼ S 14
S 23

1982

from which a new bearing tree

A fir, 10 ins. diam., bears S. 60° E., 15 lks.
dist., mkd. ¼ S23 BT.

Deposit corner stone and set a steel fence post
alongside aluminum post.

The ¼ sec. cor. of secs. 10 and 11, monumented with the
original basalt stone, 16 x 14 x 6 ins., supported by a
mound of stone, 3 ft. base, 2 ft. high, from which the
original bearing trees:

A fir, 29 ins. diam., bears S. 55° E., 36 lks.
dist., with scribe marks ¼ S visible on partially
opened blade.

A larch stump, 9 ins. diam., bears S. 40° W., 15
lks. dist., with a down larch alongside, with
opened blade, no marks visible. (Record,
S. 44° W.)

At the corner point

UNION COUNTY
SURVEYOR

Date Received 2-2-84

Date Filed 2-28-84

By G. LANGRITZ, DEPUTY

File No. 809-84 R

SHEET 2/3

Remonumentation of Certain Original Corner Points,
T. 5 S., R. 38 E., Willamette Meridian, Oregon

CHAINS

UNION COUNTY
SURVEYOR

Date Received 2-2-84

Date filed 2-28-84

By G. LANGLITZ, DEPUTY

File No. 809-84 R

PAGE 3/3

Set an aluminum post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, to solid rock, in a mound of stone, 3½ ft. base, to top, with aluminum cap mkd.

T 5 S R 38 E
¼
S 10 | S 11
1982

from which a new bearing tree

A fir, 11 ins. diam., bears N. 75° W., 71 lks. dist., mkd. ¼ S10 BT.

Deposit corner stone alongside aluminum post.

The cor. of secs. 27, 28, 33, and 34, determined at record bearing and distance from the remains of the original bearing trees:

A root hole, bears N. 47° E., 48 lks. dist., with a down and decayed pine alongside, 36 ins. diam., with scribe marks T5S R38E S27 BT visible on open blaze.

A ponderosa pine, 20 ins. diam., bears S. 25° E., 40 lks. dist., with scribe marks 34 visible on partially healed blaze.

A sawed pine stump, 20 ins. diam., bears N. 31° W., 26 lks. dist., no marks visible.

At the corner point

Set an aluminum post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, to solid rock, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.

T 5 S R 38 E
S 28 | S 27
S 33 | S 34
1982

from which new bearing trees

A fir, 10 ins. diam., bears N. 16° E., 52½ lks. dist., mkd. T5S R38E S27 BT.

A fir, 12 ins. diam., bears S. 87° W., 26 lks. dist., mkd. T5S R38E S33 BT.

A fir, 5 ins. diam., bears N. 41° W., 47½ lks. dist., mkd. T5S R38E S28 BT.

Set a steel fence post alongside aluminum post.

The cor. of secs. 21, 22, 27, and 28, determined at record distance from the remains of the original bearing trees:


A sawed pine stump, 22 ins. diam., bears N. 24° E., 62 lks. dist., with scribe marks T5S R38E visible on open blaze.

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established by W. B. Barr under GLO contract number 388 dated May 7, 1881. Surveyor General field notes state:
 Marked basalt rock 16x14x6 for 1/4 sec. corner, from which:
 A Tamarack 8 ins. diam bears S 44° W 15 lks dist
 A Fir 14 ins. diam bears S 55° E 36 lks dist

T 5 S R 38 E G-17

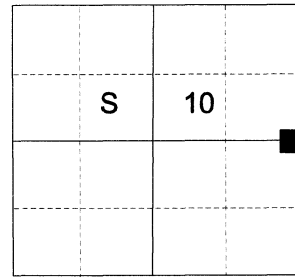

Corner perpetuated by Scott R. McIntyre under special instructions Group number 1000 for the remonumentation of certain original corners in Township 5 South, Range 38 East dated July 13, 1979. Record states: The 1/4 sec. cor. of secs. 10 and 11, monumented with the original basalt stone, 16x14x6 ins., supported by a mound of stone, 3 ft. base, 2 ft. high, from which the original bearing trees:
 A Fir, 29 ins. diam., bears S. 55° E., 36 lks. dist. with scribe marks 1/4 S visible on partially opened blaze.
 A larch stump, 9 ins. diam., bears S. 40° W., 15 lks. dist., with a down larch alongside, with opened blaze, no marks visible.

At the corner point set an aluminum post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, to solid rock, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd. from which a new bearing tree:
 A fir, 11 ins. diam., bears N. 75° W., 71 lks. dist., mkd. 1/4 S10 BT.
 Deposit corner stone alongside aluminum post.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 2 1/2" aluminum pipe with 3" aluminum "Department of the Interior, Bureau of Land Management" cap marked as shown below, 12" above ground and in a 4' diam. mound of stone, from which:

A 36" stump bears South 55° East a dist. of 23.76 ft., dead and down with BT scribe visible.
 A 21" White Fir bears North 75° West a dist. of 46.86 ft., dead and standing with healed blaze.


SEE SURVEY 035-2020

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

From the aluminum pipe monument:

NEW BEARING OBJECTS:

A 10" White Fir bears North 49° East a dist. of 6.35 ft., marked 1/4 S11 BT.
 A 11" White Fir bears South 9° East a dist. of 28.45 ft., marked 1/4 S11 BT.
 A 13" White Fir bears South 7° West a dist. of 24.75 ft., marked 1/4 S10 BT.
 A 6" White Fir bears North 31° West a dist. of 15.55 ft., marked 1/4 S10 BT.

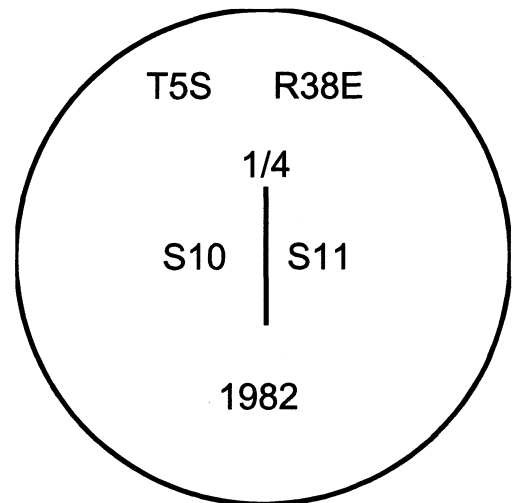

I hereby certify that the corner was perpetuated on August 28, 2020.

Witness: Kyle A. Tucker



Renewal Date: June 30, 2021

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 14° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.

