


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established by W. B. Barr under GLO contract number 388 dated May 7, 1881. Surveyor General field notes state:
 Set Stake 4 ft. long 4 in. diam. 18 in ground for 1/4 sec. corner,
 from which:
 A Pine 5 in. diam bears S5°W 13 lks dist
 A Fir 4 in. diam bears S79°E 7 lks dist

T 5 S R 38 E G-21

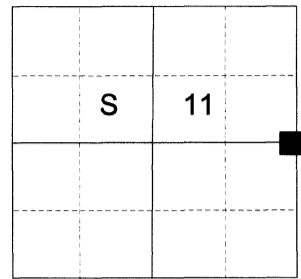

DESCRIPTION OF CORNER EVIDENCE FOUND:

None.

SEE SURVEY 035-2020

DESCRIPTION OF MONUMENT AND ACCESSORIES I

ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:

At proportionate position I set a 2 1/2" x 30" aluminum pipe, 27" in the ground, with 3" aluminum cap marked as shown below,
 From which:


NEW BEARING OBJECTS:

- A 17" White Fir bears North 82° East a dist. of 11.25 ft., marked 1/4 S12 BT.
- A 16" White Fir bears South 5° East a dist. of 4.05 ft., marked 1/4 S12 BT.
- An 8" Lodgepole Pine bears South 76° West a dist. of 42.75 ft., marked 1/4 S11 BT.
- A 16" White Fir bears North 50° West a dist. of 13.05 ft., marked 1/4 S11 BT.

Placed steel fence post approx. 1 ft. North of the aluminum cap.

I hereby certify that the corner was monumented on September 3, 2020.

Witness: Kyle A. Tucker

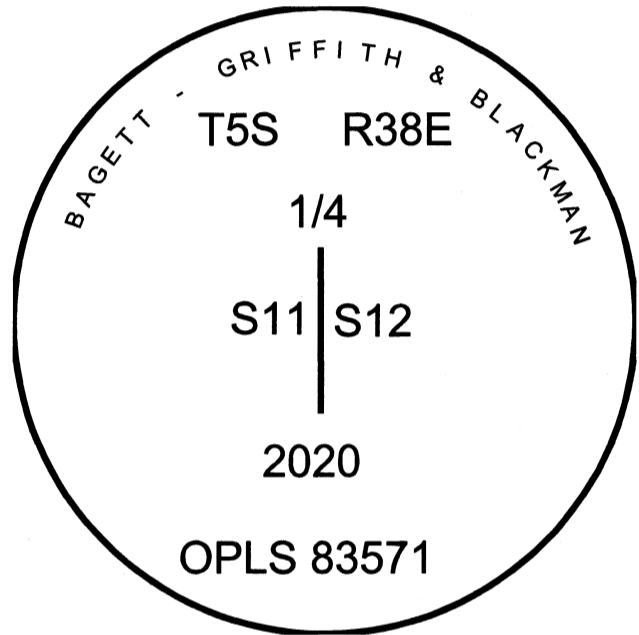

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 14° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.



Renewal Date: June 30, 2021

