


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner not previously established.

T 5 S R 38 E J-14

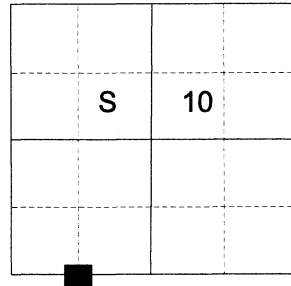

DESCRIPTION OF CORNER EVIDENCE FOUND:

None.

SEE SURVEY 035-2020

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:

At position by survey I set a 5/8" x 30" iron pin, 27" in the ground, with 2 1/2" aluminum cap marked as shown below and in a 2' diam. mound of stone,
From which:


NEW BEARING OBJECTS:

A 9" White Fir bears South 19° West a dist. of 9.55 ft., marked W 1/16 S15 BT (tree was formerly used as a fence corner and has remnants of 5 strand barb wire).
A 6" Engelmann Spruce bears North 29° West a dist. of 20.65 ft., marked W 1/16 S10 BT.

Set steel fence post approx. 1 ft. North.

An East/West bearing fence line falls approx. 2.5 ft. North

I hereby certify that the corner was monumented on September 28, 2020.
Witness: Kyle A. Tucker

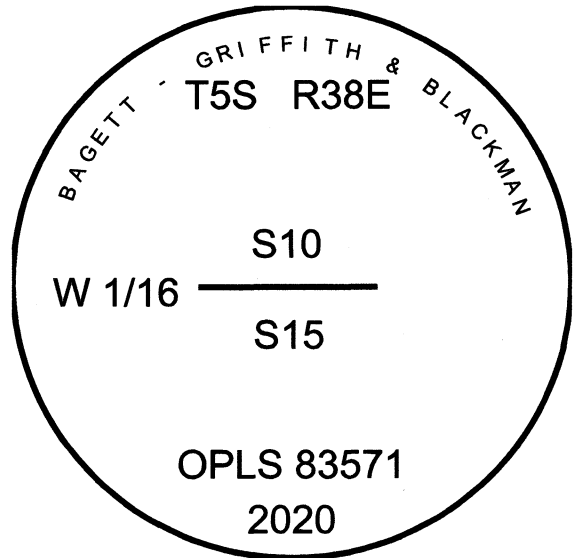

Renewal Date: June 30, 2021

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 14° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.

