


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

J-17

History of original corner establishment:

Set stake, 4 ft. long, 4 ins. diam., 18 ins. in ground, for cor.
to secs. 10, 11, 14, and 15; from which;
Fir, 8 ins. diam., bears S 52°W., 23 lks dist.;
Tamarack, 8 ins. diam., bears N44°E., 11 lks, dist.;
Black pine, 8 ins. diam., bears S 78°E., 25 lks dist.;
Fir 3 ins., diam., bears N 25°W., 12 lks dist.;

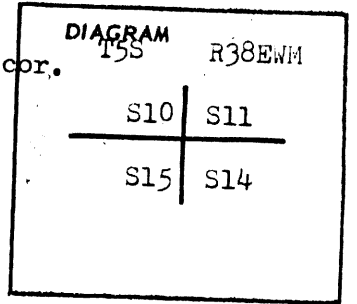

Description of corner evidence found:


Found original scribed stake with scribe. visible.
Found fir 11" in diam N25°W, with old blaze visible.;
Found tamarack 12" diam bears N44°E. 11 lks dist, scribe visible and in good shape.;
Found 12" fir bears S52°W., 23 lks dist. with scribe visible.

Description of monument and accessories I established to perpetuate the original location of this corner

At the position of the corner I set a 2" pipe with a brass cap and from the corner established new bearing tree.

Marked cap

Set 12" doug fir bears S2°E a dist of 3.5 ft.;
marked T5S, R38E S14, BT.

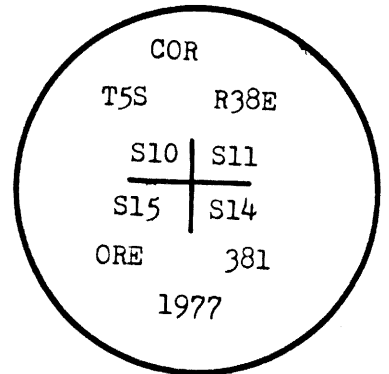

**UNION COUNTY
SURVEYOR**

Date Received _____

Date Filed _____

By _____

File No. 698-84R

REGISTERED
PROFESSIONAL
LAND SURVEYOR

James G. Voelz
OREGON
MAY 4, 1956
JAMES G. VOELZ
381

Office of..... County surveyor County of..... Union
State of..... Oregon , I hereby certify that the within instrument was filed in this office 381
for record on the 19 day of NOV, 1977, at 6 o'clock P m., (signed)
..... by
(COUNTY OFFICIAL) (DEPUTY)