


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner not previously established.

T 5 S R 38 E K-17

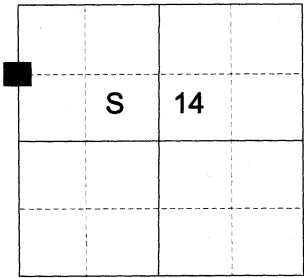

DESCRIPTION OF CORNER EVIDENCE FOUND:

No original evidence found.
Found BLM approx. corner loc. tag which bears approx. 20 ft
Westerly of surveyed position.

SEE SURVEY NUMBER 029-2026

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE
ORIGINAL LOCATION OF THIS CORNER:**

At position by Survey I set a 5/8" x 30" iron pin, 25" in the ground, with 2 1/2" aluminum
cap marked as shown below, from which:


NEW BEARING OBJECTS:

A 6" Douglas Fir bears North 15° East, a distance of
12.55 feet, marked N1/16 S14 BT.
A 6" Douglas Fir bears North 64° West, a distance of
5.95 feet, marked N1/16 S15 BT.


Set steel fence post approx. 0.5 ft. West

I hereby certify that the corner was monumented on June
11, 2026

Witness: Kyle Tucker, Emily McClelland

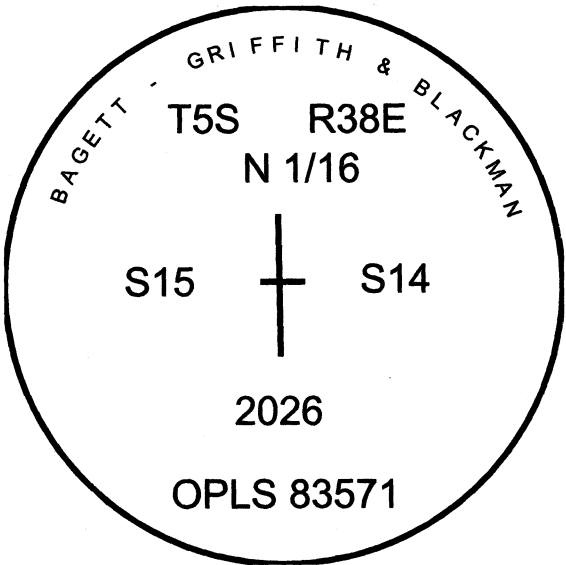

Renewal Date: June 30, 2027

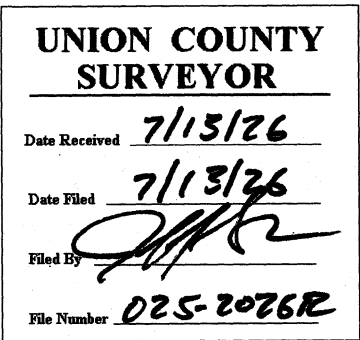

I used a tape and compass in the establishment of
the bearing trees. 14° East was used for
declination and measured to a brass washer marked
"OPLS 83571" and tacked to the opened BT blaze.
Distance was to a 60-D spike in the root crown on
the right side of the tree.